

April
2025



PRODUCT LINEUP

COMPANY INFORMATION

Company Name i-PRO Co., Ltd.

Established 2019

Representatives Masato Nakao
Shohei Ozaki

Lines of Business Development, manufacture and sales of devices and modules for the security, medicine and industrial fields.
Providing solutions including system integration, construction, maintenance and related services.

Number of Employees Approx. 1400 (including group companies)

Location Addresses ■ 2-15-1 Konan, Minato-ku, Tokyo, Japan
■ 7-9-66 Hakozaki, Higashi-ku, Fukuoka City, Fukuoka, Japan

Group Companies

Americas: i-PRO Americas Inc.

Houston : 8550 Fallbrook Road, Suite 200, Houston, TX 77064, USA

Anaheim : 2390 E. Orangewood Ave., Suite 490, Anaheim, CA 92806, USA

Canada : 5750 Explorer Drive, Suite 101, Mississauga, Ontario, Canada

EMEA : i-PRO EMEA B.V.

Amsterdam: Laarderhoogtweg 25, 1101 EB Amsterdam, Netherlands


Asia Pacific: i-PRO APAC Pte. Ltd.

Singapore : 114 Lavender #01-36,51,52, CT Hub 2, Singapore 338729

Brisbane : 10/10 Depot Street, Banyo QLD, Australia 4014

China: i-PRO Sensing Technology (Suzhou) Co., Ltd.

1478 Binhe Road, Huqiu district, Suzhou, Jiangsu province

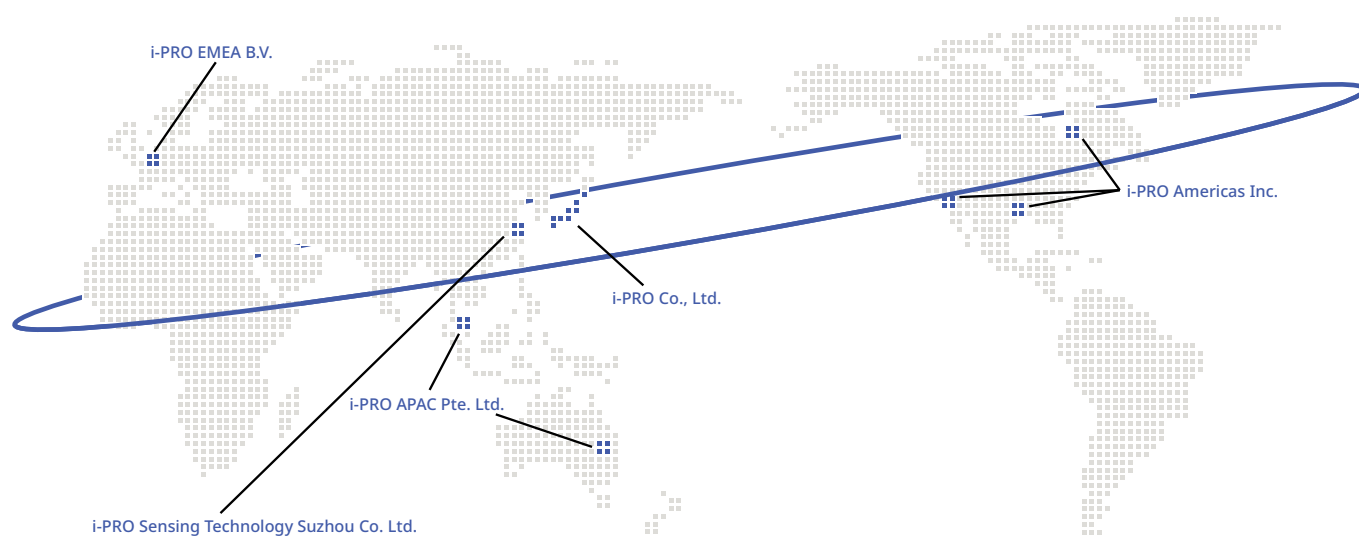

i-PRO
The Power of Truth

We strive to capture moments of underlying truth to better support the decisions of those professionals who protect and save lives, providing a safer and more peaceful world.

We have taken on this challenge to develop technological solutions that extend human senses with innovations that inform and protect, even in the most challenging environments.

We envision a future where it's possible to prevent unfortunate events. A future striking unmet medical conditions to improve the lives of millions of people.

We will be a trusted partner, focusing on the needs of our partners and customers to help create a safer and more peaceful world.

i-PRO Co., Ltd.


i-pro.com



PRODUCT & TECHNOLOGY MILESTONES

i-PRO Co., Ltd., is a global leader of advanced sensing technologies in the fields of Intelligent Surveillance, Public Safety and Industrial/Medical Imaging. Established in 2019, i-PRO was built on a legacy of over 60 years of innovation with Panasonic.

The company's products, software and services extend human senses to capture moments of truth with innovations that inform and protect. In order to help create a safer world, i-PRO supports the work of professionals who protect and save lives.

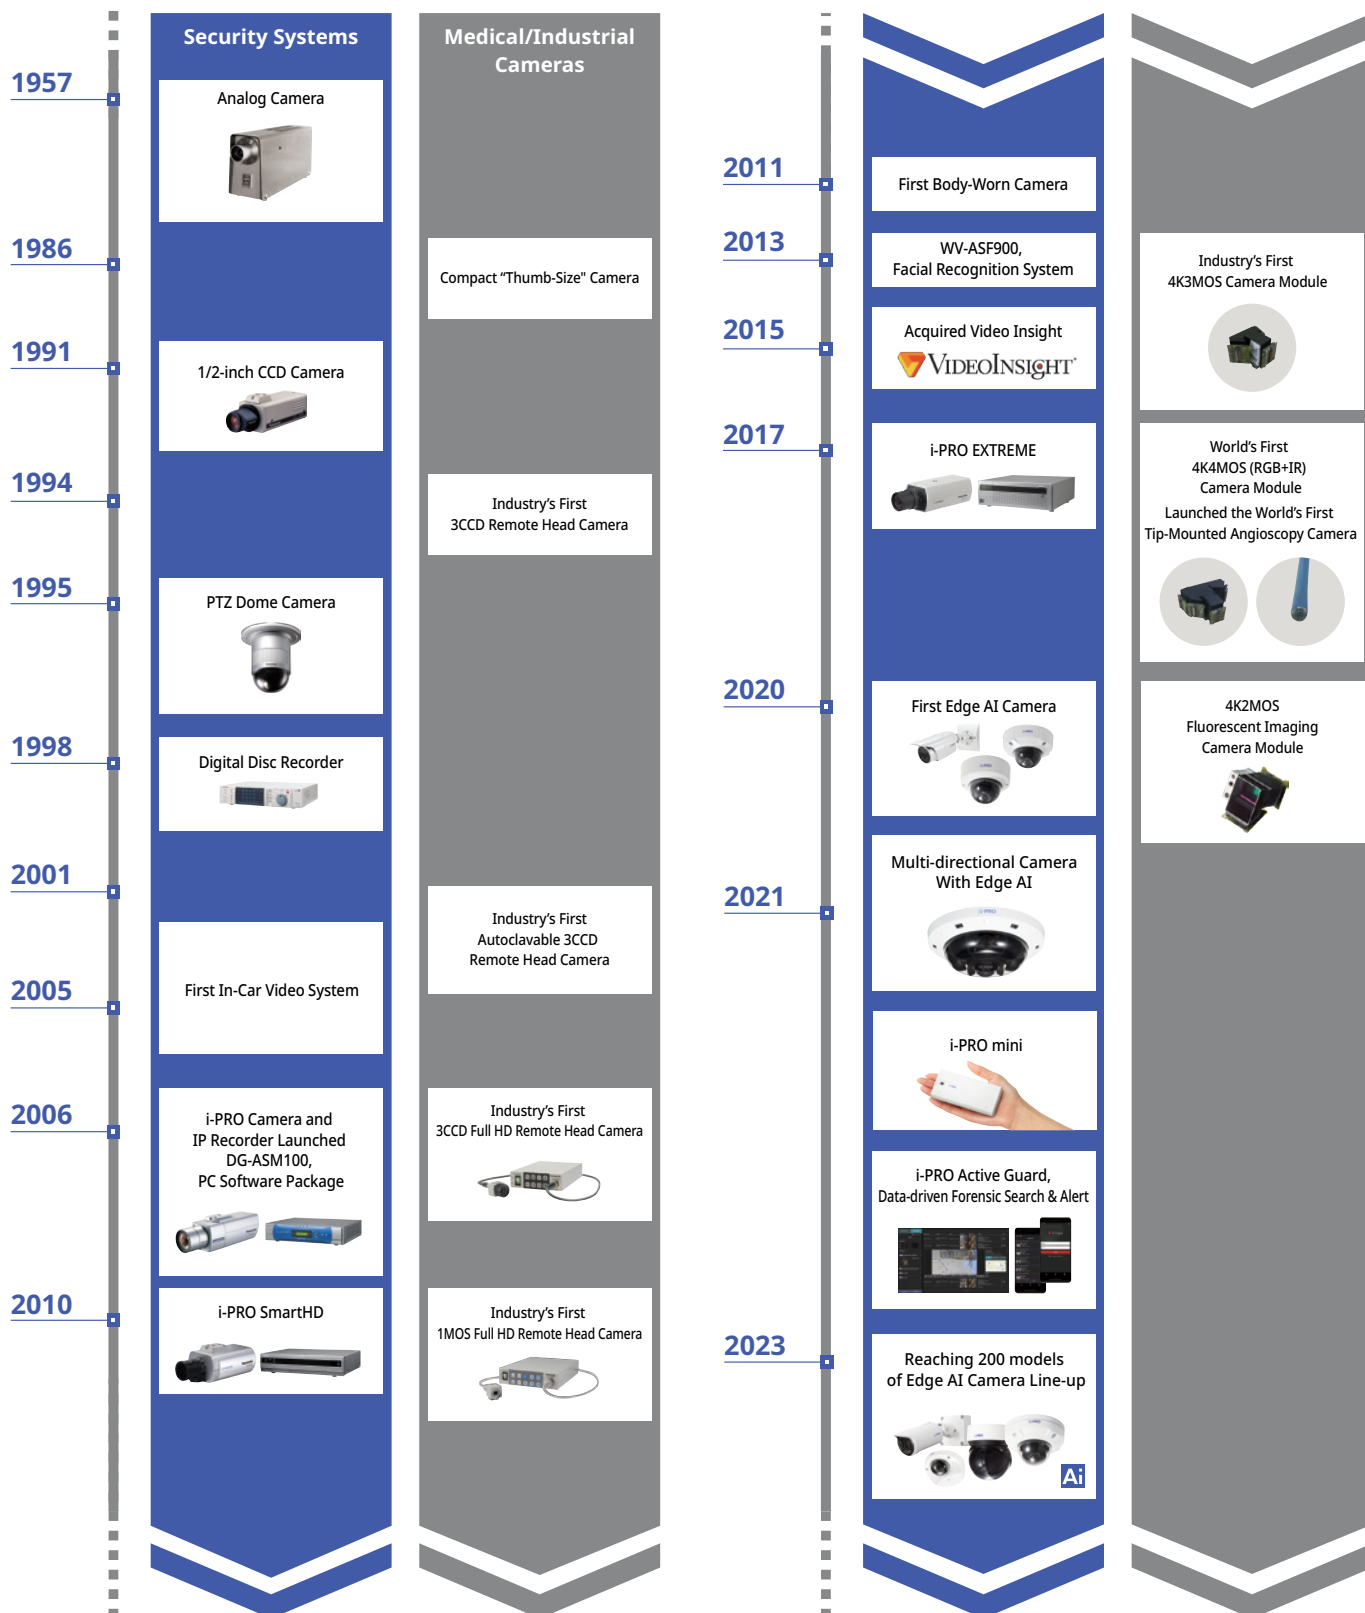

CONTENTS

i-PRO CORE TECHNOLOGY

Edge AI Technology	6
Open Platform	6
Cyber Security	7
Product Reliability	7
Reduced Bandwidth	8
Ease of Installation.....	8


i-PRO PRODUCTS

i-PRO Product Selector	9
Multi-Sensor Cameras.....	10
Outdoor PTZ Cameras	11
Indoor PTZ Cameras.....	14
Outdoor Dome Cameras.....	15
Indoor Vandal Dome Cameras.....	18
Indoor Dome Cameras	19
Bullet Cameras.....	20
Box Cameras	23
Fisheye Cameras	23
Outdoor Compact Cameras.....	24
Indoor Compact Cameras.....	24
NVR WJ-NX310 / NX410 / NX510 Series	26
NVR with a build-in PoE+ switch WJ-NU101 / 201 / 300 / 301 Series.....	27
Management Software	28
i-PRO Mobile APP	28
Accessories.....	29
i-PRO Active Guard.....	30
Edge AI Analytics.....	31
System Design Tool	32
i-PRO Configuration Tool (iCT).....	32
Network Camera Model Number Format.....	33

SECURITY CAMERA ACCESSORY CHART

MULTI-DIRECTIONAL + PTZ CAMERAS	34
MULTI-SENSOR CAMERAS.....	34
DUAL-SENSOR CAMERAS	35
OUTDOOR PTZ CAMERAS	35/36/37/38
INDOOR PTZ CAMERAS	39
CORNER CAMERA.....	40
OUTDOOR DOME CAMERAS	40
INDOOR DOME CAMERAS.....	41
COMPACT DOME CAMERAS.....	42
HIGH ZOOM BULLET CAMERA / OUTDOOR BULLET CAMERAS	43
INDOOR BOX CAMERAS.....	44
OUTDOOR / INDOOR FISHEYE CAMERAS.....	44
COMPACT DOME CAMERAS.....	45
INDOOR COMPACT CAMERA.....	45

i-PRO CORE TECHNOLOGY

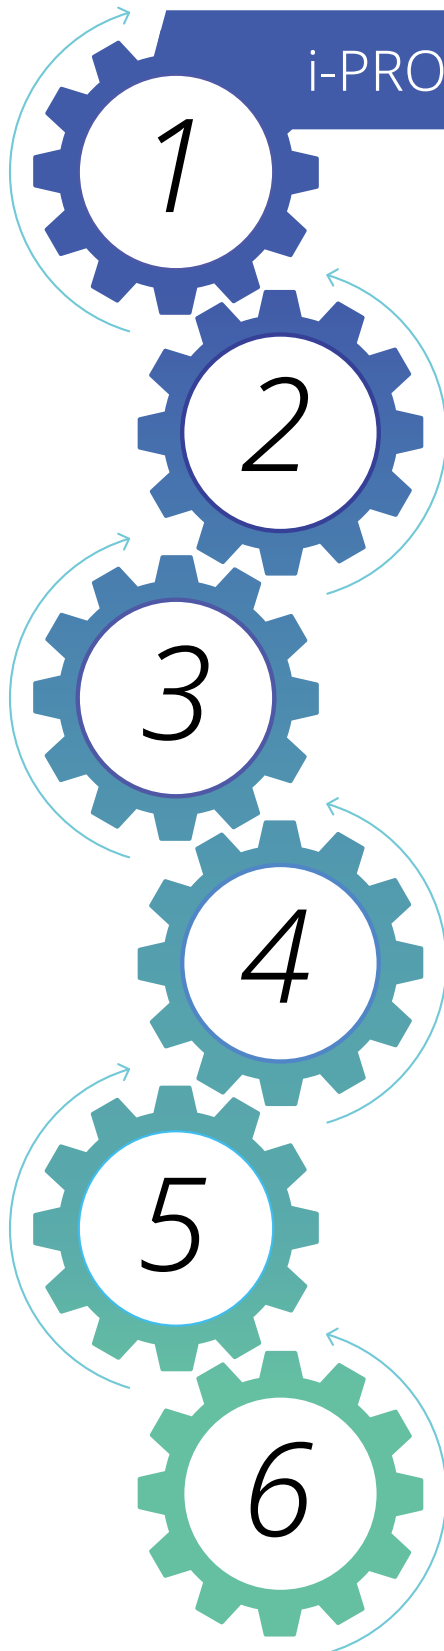

Edge AI Technology

- i-PRO Edge AI Cameras
- i-PRO Active Guard
- Computer Vision Chip Architecture
- Wide Variety of Edge AI Cameras

Open Platform

- Integration with Leading VMS
- Integration with AI Application Partners
- Provides Development Support with Free SDK/API

Cyber Security

- Built-In Cybersecurity Features
- Pre-Installed Signed Certificates
- FIPS-Certified Secure Element
- NDAA-Compliant

Product Reliability

- Environmental Resistance
- Vandal Resistance
- Corrosion Resistance
- ClearSight Coating
- High Durability Mechanism for PTZ Cameras

Reduced Bandwidth

- ROI (Region of Interest)
- GOP Control

Ease of Installation

- Cameras Designed for Easier Installation
- Easy Kitting Package
- Installation Tools

■ EMEA

https://i-pro.com/products_and_solutions/eu-en/surveillance/solutions/technologies/ipro-core-technology


■ APAC

https://i-pro.com/products_and_solutions/apac-en/surveillance/solutions/technologies/ipro-core-technology

Edge AI Technology


i-PRO Edge AI Cameras

With powerful Edge AI processor at the edge, i-PRO network cameras can process advanced analytics locally and only send the lightweight results as metadata to the backend server.

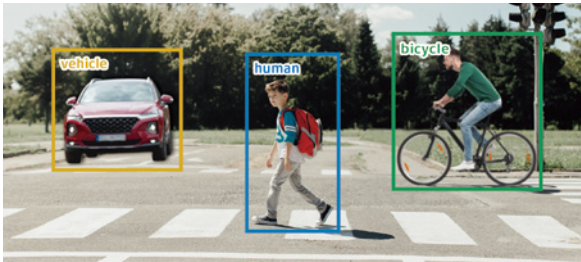

i-PRO Active Guard

i-PRO Active Guard is a time-saving search software which will help you to find out a specific objects quickly based on the metadata information from i-PRO Edge AI cameras.

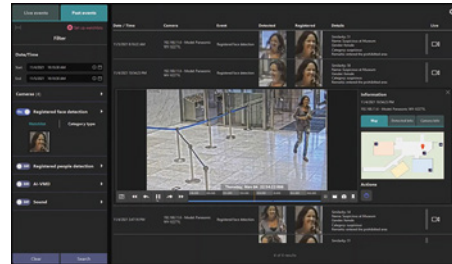


Computer Vision Chip Architecture

Collaborating with AI SoC company Ambarella, i-PRO network cameras have on-boarding advanced analytics technologies inside.



Wide Variety of Edge AI Cameras


i-PRO keeps expanding the product line-up of edge AI capable cameras since 2020 and it is growing to 273 models in 2025.

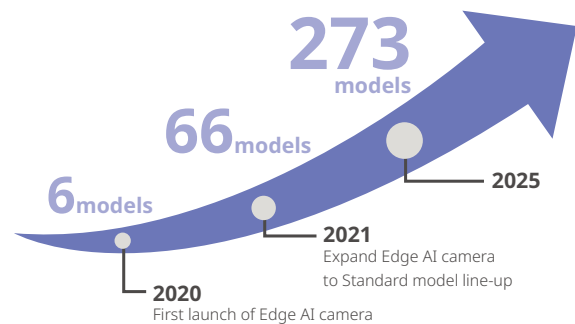

Open Platform

Integration with Leading VMS

i-PRO network cameras are well integrated with leading VMS software, and i-PRO Active Guard integrated with in-house VMS Video Insight as well as Genetec Security Center and Milestone XProtect.

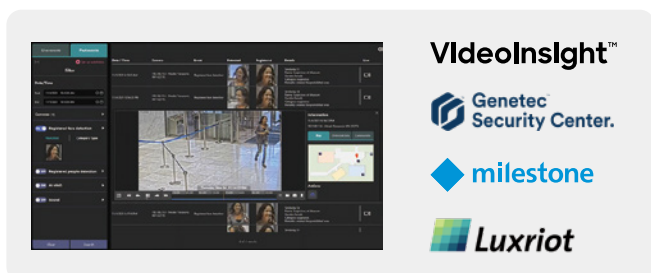


Integration with AI Application Partners

We will provide various AI applications developed in-house and developed by our global AI application partners.



Provides Development Support with Free SDK/API

Free SDK/API and technical support is available for application partners.

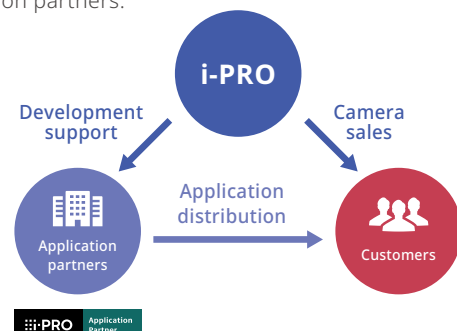

Cyber Security

Built-In Cybersecurity Features

i-PRO cameras are designed and built with trust, safety, and security in mind. We take cyber security just as seriously as the lives and assets our products are made to protect. Our cameras include robust security features to meet the needs of customers who comply with security frameworks.



Pre-Installed Signed Certificates (GlobalSign®)

i-PRO was the first company in the security industry to provide a pre-installed signed certification by 3rd party certificate authority. Data is encrypted by SSL with pre-installed certified key and it will not allow any snooping and alteration.

FIPS-Certified Secure Element

FIPS (Federal Information Processing Standards) are standards and guidelines for federal computer systems that are developed by NIST. Our latest models of i-PRO network cameras have equipped a Secure Element which is certified the FIPS compliant.

NDAA-Compliant


i-PRO is proud to confirm that our products are compliant under the National Defense Authorization Act (NDAA). i-PRO doesn't use any manufactures, system on chips or any other components that have been banned under section 889 of the NDAA.



Product Reliability

Environmental Resistance

i-PRO cameras are engineered to withstand extreme environmental conditions, including extreme temperatures, humidity, dust, and wind. Through rigorous testing during product development, we ensure that our cameras deliver reliable performance even in harsh environments.




Corrosion Resistance

Salt resistant models with special coating on the camera body and screws will work without a corrosion even in salt-air condition.



ClearSight Coating

Our ClearSight coating enables to repel water drops on the dome cover in raining. This will provide you clear image in daytime and nighttime.



Vandal Resistance

Vandal resistance is one of the most important features of security cameras. IK10 rating indicates that the camera has a superior level of resistance against impact. All i-PRO outdoor cameras comply the IK10 rating or more, which provides protection from physical damage.



High Durability Mechanism for PTZ Cameras

Pan/Tilt gear drive mechanism allows our i-PRO PTZ cameras to have longer life and more preciseness than a general belt-drive mechanism.



Reduced Bandwidth

ROI (Region of Interest)

ROI reduces bit rate via AI object detection by using Smart VIQS to assign different data rates to important and non-important areas. Smart P Picture Control can further compress images by skipping the encoding of non-object detected areas.



GOP Control

GOP control adjusts the length of the Group of Pictures (GOP) based on object detection. It shortens the GOP length in scenes with detected objects for better random accessibility and extends it in scenes without detected objects to reduce the bit rate.

Ease of Installation

Cameras Designed for Easier Installation

i-PRO cameras are designed for hassle-free installation by a single installer. Specialized features like a hooking structure, lightweight design, and temporary holding structure make setup quick and easy.




Installation Tools

i-PRO provides useful installation tools to support system design and configuration works easier and more efficient.


Product Selector

Find and compare i-PRO camera products.

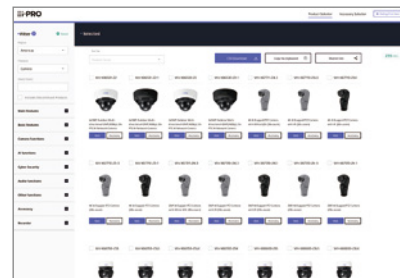

System Design Tool

Integrators can quickly simulate any design or setup.

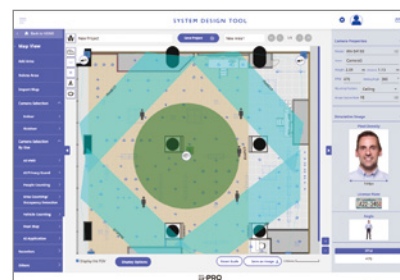


Easy Kitting Package

The i-PRO easy kitting package is helpful for rapid pre-configuration of multiple devices. Cameras can be configured quickly without opening the box.



i-PRO Configuration Tool

Efficiently configure, maintain, and update multiple devices.

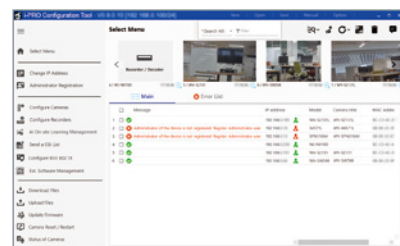

i-PRO NETWORK PRODUCTS



Multi Sensor Cameras

i-PRO multi-sensor cameras capture the highest quality images even in very challenging dynamic environments. These cameras can excel at capturing clear images, even in low light conditions from multiple angles through the use of their four repositionable lenses.



PTZ Cameras

i-PRO PTZ cameras combine unparalleled image quality with incredible durability and reliability. The perfect security camera for wide-area coverage requiring pan, tilt and zoom capability.



Dome Cameras

i-PRO fixed dome cameras have the power to be more discreet than standard fixed network cameras. i-PRO fixed dome cameras work well in busy open areas since they can conceal which direction they are pointing while still providing excellent and reliable video.



Bullet/Box Cameras

i-PRO fixed box bullet/box cameras provide a clearly visible, fixed angle of view, making it easy to see exactly where they're pointing and record a precisely defined area.



360 Degree Cameras

i-PRO vandal resistant 360° dome cameras are ideal for surveillance applications where wide area coverage is required. This type of camera allows for multiple viewing angles and can be used to improve area management as well as detect activities in a large area.



Compact dome

Compact dome cameras with anti vibration and discreet design are suitable for installation in cars, buses, and other vehicles.



i-PRO mini

i-PRO mini provides powerful open AI technology in a compact format. It blends seamlessly into any surroundings and provides insights to solve a variety of problems. Extendable to marketing functions with third party AI apps.

i-PRO Product Selector

Overview

i-PRO releases Product Selector for both on Web and smartphone app. They are used to select the model by rich filters that meets your various needs from the i-PRO lineup of products.

Product Selector for Web

Product Selector for Web supports all categories of the i-PRO products. After selecting a product (camera or embedded recorder) that meets your requirements, you can easily select accessories needed for installation by simply setting the installation location by using the Accessory Selector.



Accessory Selector also provides a function that judges AI extension software compatibility and shows conditions and remarks.



Product Selector for Smartphone

This application can be used to select a network camera that meets your needs and accessories. And anyone can easily perform tasks from camera selection to proposal creation.

<https://i-pro.com/selector/product/>

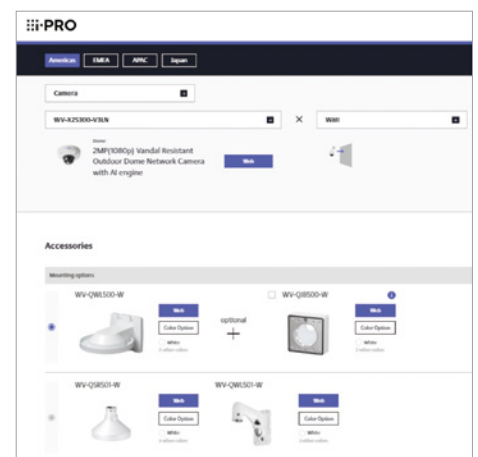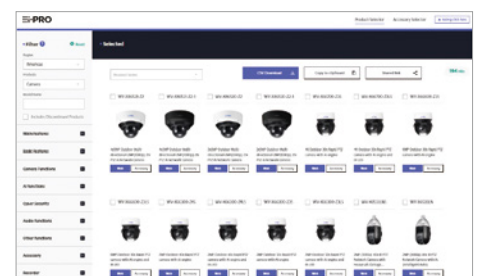

MULTI- SENSOR CAMERAS



MODEL#	WV-X86531-Z2 (Z2-1) WV-X86530-Z2 (Z2-1)	WV-S8574L (LG) WV-S8573L (LG)	WV-S8564L (LG) WV-S8563L (LG)	WV-S8544L (LG) WV-S8543L (LG)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	PTZ: 2MP Multi: 5MP x4 WV-S86531 5MP x3 WV-S86530	8MP(4K) x4 WV-S8574L (LG) 8MP(4K) x3 WV-S8573L (LG)	6MP x4 WV-S8564L (LG) 6MP x3 WV-S8563L (LG)	4MP x4 WV-S8544L (LG) 4MP x3 WV-S8543L (LG)
Analytics (Max. # of AI apps installation)	Edge AI (6) / Auto tracking	Edge AI (4)	Edge AI (4)	Edge AI (4)
Sensor	PTZ: 1/2.8 CMOS Multi: 1/2.7 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS
Focal length / F-number	PTZ: 4.0 to 84.6 mm, F1.6 Multi: 3.2 mm, F2.0	3.1 mm, F1.44	3.1 mm, F1.44	2.9 to 7.3mm, F2.0
Optical Zoom	PTZ: 21x, Motorized / Multi: -	—	—	2.5x, Motorized
Horizontal angle of view (16:9)	PTZ: 3.7° to 77° / Endless pan Multi: 97° / lens	108° / lens	108° / lens	43° to 100° / lens
Built-in IR-LED	—	40 m / 131 ft. 30 m / 99 ft. (LG)	40 m / 131 ft. 30 m / 99 ft. (LG)	20 m / 66 ft. 15 m / 49 ft. (LG)
Min. Illumination (Color / B&W)	PTZ: 0.011 lx / 0.006 lx Multi: 0.12 lx / 0.10 lx	0.084 lx / 0 lx 0.24 lx / 0 lx (LG)	0.084 lx / 0 lx 0.24 lx / 0 lx (LG)	0.21 lx / 0 lx 0.59 lx / 0 lx (LG)
WDR [Dynamic Range]	PTZ: Yes [144dB] Multi: Yes [108dB]	Yes [120dB]	Yes [120dB]	Yes [108dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	PTZ: 60 fps Multi: 15 fps	15 fps	15 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10
Operating Temperature	-40 °C to +55 °C / -40 °F to +131 °F (60W PoE/24V AC)	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F
Power Source / Consumption	PoE++ 35.6W	PoE+ 25.4W	PoE+ 25.4W	PoE+ 25.4W
Other	FIPS 140-2 LV3 [*1], NEMA TS2, Black (Z2-1)	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (LG), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (LG), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (LG), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

MULTI- SENSOR CAMERAS



MODEL#	WV-S8544 (G) WV-S8543 (G)	WV-S85702-F3L (F3L1)	WV-S85402-V2L (V2L1)	WV-U85402-V2L (V2L1)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	4MP x4 WV-S8544 (G) 4MP x3 WV-S8543 (G)	8MP(4K) x2	4MP x2	4MP x2
Analytics (Max. # of AI apps installation)	Edge AI (4)	Edge AI (4)	Edge AI (4)	VMD
Sensor	1/2.7 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.7 CMOS
Focal length / F-number	2.9 to 7.3mm, F2.0	3.1 mm, F1.4	2.9 to 7.3 mm, F2.0	2.9 to 7.3 mm, F2.0
Optical Zoom	2.5x, Motorized	—	2.5x, Motorized	2.5x, Motorized
Horizontal angle of view (16:9)	43° to 100° / lens	104° / lens	43° to 100° / lens	43° to 100° / lens
Built-in IR-LED	—	40 m / 131 ft.	40 m / 131 ft.	40 m / 131 ft.
Min. Illumination (Color / B&W)	0.21 lx / 0.12 lx 0.59 lx / 0.34 lx (G)	0.084 lx / 0 lx	0.21 lx / 0 lx	0.21 lx / 0 lx
WDR [Dynamic Range]	Yes [108dB]	Yes [120dB]	Yes [108dB]	Yes [108dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	15 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F
Power Source / Consumption	PoE+ 17.3W	PoE+ 18.9W	PoE+ 22.2W	PoE+ 18.9W
Other	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (G), Re-paintable	FIPS 140-2 LV3 [*1], Black (F3L1)	FIPS 140-2 LV3 [*1], Black (V2L1)	FIPS 140-2 LV3 [*1], Black (V2L1)
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

OUTDOOR PTZ CAMERAS



MODEL#	WV-X67711-Z3L3	WV-X67710-Z3-3 (Z3L3) WV-X67710-Z3-1 (Z3L1)	WV-X67701-Z3L3	WV-X67700-Z3-3 (Z3L3)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	8MP(4K)	8MP(4K)	8MP(4K)
Analytics (Max. # of AI apps installation)	Edge AI (3) / Auto tracking	Edge AI (3) / Auto tracking	Edge AI (3) / Auto tracking	Edge AI (3) / Auto tracking
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.5 to 135 mm, F1.8	4.5 to 135 mm, F1.8	4.5 to 135 mm, F1.8	4.5 to 135 mm, F1.8
Optical Zoom	30x, Motorized	30x, Motorized	30x, Motorized	30x, Motorized
Horizontal angle of view (16:9)	2.5° to 62°	2.5° to 62°	2.5° to 62°	2.5° to 62°
Built-in IR-LED	160 m / 525 ft. *White LED Light	350 m / 1,148 ft. (Z3L3, Z3L1)	160 m / 525 ft. *White LED Light	350 m / 1,148 ft. (Z3L3)
Min. Illumination (Color / B&W)	0 lx / 0.1 lx	0.13 lx / 0.1 lx (Z3-3, Z3-1) 0.13 lx / 0 lx (Z3L3, Z3L1)	0 lx / 0.1 lx	0.13 lx / 0.1 lx (Z3-3) 0.13 lx / 0 lx (Z3L3)
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	—	—	—	—
Weather / Vandal Resistant	IP68, IP66 / IK10	IP68, IP66 / IK10	IP68, IP66 / IK10	IP68, IP66 / IK10
Operating Temperature	-50 °C to +65 °C -58 °F to +149 °F	-50°C to +65°C, -58°F to +149°F (Z3-3, Z3L3) -50°C to +60°C, -58°F to +140°F (Z3-1, Z3L1)	-50 °C to +65 °C -58 °F to +149 °F	-50 °C to +65 °C -58 °F to +149 °F
Power Source / Consumption	PoE++ / 24V AC/DC 70W (PoE++ Class 8)	PoE++ / 24V AC/DC 65W (PoE++ Class 8) (Z3-3, Z3-1) PoE++ / 24V AC/DC 70W (PoE++ Class 8) (Z3L3, Z3L1)	PoE++ / 100-240V AC 70W (PoE++ Class 8)	PoE++ / 100-240V AC 65W (PoE++ Class 8) (Z3-3) PoE++ / 100-240V AC 70W (PoE++ Class 8) (Z3L3)
Other	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant, Black (Z3-1, Z3L1)	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

OUTDOOR PTZ CAMERAS



MODEL#	WV-X67311-Z4L3	WV-X67310-Z4-3 (Z4L3) WV-X67310-Z4-1 (Z4L1)	WV-X67301-Z4L3	WV-X67300-Z4-3 (Z4L3)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	2MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.25 to 170 mm, F1.6	4.25 to 170 mm, F1.6	4.25 to 170 mm, F1.6	4.25 to 170 mm, F1.6
Optical Zoom	40x, Motorized	40x, Motorized	40x, Motorized	40x, Motorized
Horizontal angle of view (16:9)	1.9° to 66°	1.9° to 66°	1.9° to 66°	1.9° to 66°
Built-in IR-LED	280 m / 918 ft. *White LED Light	560 m / 1,837 ft. (Z4L3, Z4L1)	280 m / 918 ft. *White LED Light	560 m / 1,837 ft. (Z4L3)
Min. Illumination (Color / B&W)	0 lx / 0.006 lx	0.011 lx / 0.006 lx (Z4-3, Z4-1) 0.011 lx / 0 lx (Z4L3, Z4L1)	0 lx / 0.006 lx	0.011 lx / 0.006 lx (Z4-3) 0.011 lx / 0 lx (Z4L3)
WDR [Dynamic Range]	Yes [144dB]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	—	—	—	—
Weather / Vandal Resistant	IP68, IP66 / IK10	IP68, IP66 / IK10	IP68, IP66 / IK10	IP68, IP66 / IK10
Operating Temperature	-50 °C to +65 °C -58 °F to +149 °F	-50°C to +65°C -58°F to +149°F (Z4-3, Z4L3) -50°C to +60°C -58°F to +140°F (Z4-1, Z4L1)	-50 °C to +65 °C -58 °F to +149 °F	-50 °C to +65 °C -58 °F to +149 °F
Power Source / Consumption	PoE++ / 24V AC/DC 70W (PoE++ Class 8)	PoE++ / 24V AC/DC 65W (PoE++ Class 8) (Z4-3, Z4-1) PoE++ / 24V AC/DC 70W (PoE++ Class 8) (Z4L3, Z4L1)	PoE++ / 100-240V AC 70W (PoE++ Class 8)	PoE++ / 100-240V AC 65W (PoE++ Class 8) (Z4-3) PoE++ / 100-240V AC 70W (PoE++ Class 8) (Z4L3)
Other	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant, Black (Z4-1, Z4L1)	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant	FIPS 140-2 LV3 [*1], NEMA TS2, Salt resistant
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA502 is needed.

OUTDOOR PTZ CAMERAS



MODEL#	WV-X66700-Z3LK (Z3LS) WV-S66700-Z3LN (Z3L)	WV-X66600-Z3LK (Z3LS) WV-S66600-Z3LN (Z3L)	WV-X66300-Z4LK (Z4LS) WV-S66300-Z4LN (Z4L)	WV-X66300-Z3LK (Z3LS) WV-S66300-Z3LN (Z3L)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	6MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3) / Auto tracking	Edge AI (3) / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.5 to 135 mm, F1.8	4.5 to 135 mm, F1.8	4.25 to 170 mm, F1.6	4.25 to 136 mm, F1.6
Optical Zoom	30x, Motorized	30x, Motorized	40x, Motorized	32x, Motorized
Horizontal angle of view (16:9)	2.5° to 62° / Endless pan	2.5° to 62° / Endless pan	2.0° to 65° / Endless pan	2.4° to 65° / Endless pan
Built-in IR-LED	280 m / 920 ft.	280 m / 920 ft.	350 m / 1,148 ft.	350 m / 1,148 ft.
Min. Illumination (Color / B&W)	0.13 lx / 0 lx	0.13 lx / 0 lx	0.011 lx / 0 lx	0.011 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-50 °C to +60 °C -58 °F to +140 °F	-50 °C to +60 °C -58 °F to +140 °F	-50 °C to +60 °C -58 °F to +140 °F	-50 °C to +60 °C -58 °F to +140 °F
Power Source / Consumption	PoE++ 45.9W	PoE++ 45.9W	PoE++ 45.9W	PoE++ 45.9W
Other	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z3LK, Z3LN), Salt resistant (X-series), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z3LK, Z3LN), Salt resistant (X-series), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z4LK, Z4LN), Salt resistant (X-series), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z3LK, Z3LN), Salt resistant (X-series), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

OUTDOOR PTZ CAMERAS



MODEL#	WV-X66700-Z3K (Z3S) WV-S66700-Z3N (Z3)	WV-X66600-Z3K (Z3S) WV-S66600-Z3N (Z3)	WV-X66300-Z4K (Z4S) WV-S66300-Z4N (Z4)	WV-X66300-Z3K (Z3S) WV-S66300-Z3N (Z3)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	6MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3) / Auto tracking	Edge AI (3) / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.5 to 135 mm, F1.8	4.5 to 135 mm, F1.8	4.25 to 170 mm, F1.6	4.25 to 136 mm, F1.6
Optical Zoom	30x, Motorized	30x, Motorized	40x, Motorized	32x, Motorized
Horizontal angle of view (16:9)	2.5° to 62° / Endless pan	2.5° to 62° / Endless pan	2.0° to 65° / Endless pan	2.4° to 65° / Endless pan
Built-in IR-LED	—	—	—	—
Min. Illumination (Color / B&W)	0.13 lx / 0.1 lx	0.13 lx / 0.1 lx	0.011 lx / 0.006 lx	0.011 lx / 0.006 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-50 °C to +60 °C -58 °F to +140 °F	-50 °C to +60 °C -58 °F to +140 °F	-50 °C to +60 °C -58 °F to +140 °F	-50 °C to +60 °C -58 °F to +140 °F
Power Source / Consumption	PoE++ 37.8W	PoE++ 37.8W	PoE++ 37.8W	PoE++ 37.8W
Other	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z3K, Z3N), Salt resistant (X-series), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z3K, Z3N), Salt resistant (X-series), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z4K, Z4N), Salt resistant (X-series), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z3K, Z3N), Salt resistant (X-series), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

OUTDOOR PTZ CAMERAS



MODEL#	WV-X6533LN (LNS)	WV-S6532LN (LNS)	WV-S65340-Z4 (Z4N)(Z4G)(Z4N1)(Z4K)	WV-S65340-Z2 (Z2N)(Z2G)(Z2N1)(Z2K)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	2MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	i-VMD / Auto tracking	i-VMD / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.25 to 170 mm, F1.6	4.25 to 95 mm, F1.6	4.25 to 170 mm, F1.6	4.0 to 84.6 mm, F1.6
Optical Zoom	40x, Motorized	22x, Motorized	40x, Motorized	21x, Motorized
Horizontal angle of view (16:9)	1.9° to 66° / Endless pan	3.4° to 66° / Endless pan	2.1° to 65° / Endless pan	3.7° to 77° / 0-350 Pan
Built-in IR-LED	350 m / 1,150 ft. (60W PoE/24V AC)	100 m / 330 ft.	—	—
Min. Illumination (Color / B&W)	0.015 lx / 0 lx	0.015 lx / 0 lx	0.011 lx / 0.006 lx 0.03 lx / 0.017 lx (Z4G)	0.011 lx / 0.006 lx 0.03 lx / 0.017 lx (Z2G)
WDR [Dynamic Range]	Yes [144dB]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —
External I/O	Yes	Yes	Yes	Yes
SD Memory Card Slot	SDXC	SDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10
Operating Temperature	-50 °C to +60 °C / -58 °F to +140 °F (60W PoE/24V AC)	-40 °C to +60 °C / -40 °F to +140 °F (60W PoE/24V AC)	-50 °C to +60 °C / -58 °F to +140 °F (PoE++/24V AC)	-50 °C to +60 °C / -58 °F to +140 °F (PoE++/24V AC)
Power Source / Consumption	60W PoE / PoE+ / 24V AC 50W (60W PoE)	60W PoE / PoE+ / 24V AC 50W (60W PoE)	PoE++ / PoE+ / 24V AC 51W (PoE++)	PoE++ / PoE+ / 24V AC 51W (PoE++)
Other	ClearSight, Defroster, Salt resistant (LNS)	ClearSight, Defroster, Salt resistant (LNS)	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z4N, Z4N1, Z4K), Smoke dome (Z4G), Black (Z4N1), Salt resistant (Z4K), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, ClearSight (Z2N, Z2N1, Z2K), Smoke dome (Z2G), Black (Z2N1), Salt resistant (Z2K), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

OUTDOOR PTZ CAMERAS



MODEL#	WV-S65501-Z1 (Z1G)	WV-S65302-Z2 (Z2G) (Z2-1)	WV-S65301-Z1 (Z1G) (Z1-1) (Z1S)	WV-S65300-ZY (ZYG)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	5MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3) / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.7 to 47.0 mm, F1.6	4.0 to 84.6 mm, F1.6	4.7 to 47.0 mm, F1.6	2.9 to 9 mm, F1.3
Optical Zoom	10x, Motorized	21x, Motorized	10x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	6.2° to 58° / Endless pan	3.7° to 77° / Endless pan	6.7° to 62° / Endless pan	36° to 113° / 0-350 pan
Built-in IR-LED	—	—	—	—
Min. Illumination (Color / B&W)	0.08 lx / 0.06 lx 0.22 lx / 0.18 lx (Z1G)	0.011 lx / 0.006 lx 0.03 lx / 0.017 lx (Z2G)	0.011 lx / 0.006 lx 0.03 lx / 0.017 lx (Z1G)	0.007 lx / 0.004 lx 0.02 lx / 0.012 lx (ZYG)
WDR [Dynamic Range]	Yes [132dB]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes [*2] / —	Yes / Yes [*2] / —	Yes / Yes [*2] / —	Yes / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-30 °C to +55 °C -22 °F to +131 °F	-30 °C to +55 °C -22 °F to +131 °F	-30 °C to +55 °C -22 °F to +131 °F	-30 °C to +55 °C -22 °F to +131 °F
Power Source / Consumption	PoE+ / 12V DC [*2] 18.4W (PoE+)	PoE+ / 12V DC [*2] 18.4W (PoE+)	PoE+ / 12V DC [*2] 18.4W (PoE+)	PoE / 12V DC [*2] 12W (PoE)
Other	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (Z1G), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (Z2G), Black (Z2-1), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (Z1G), Black (Z1-1), Salt resistant (Z1S), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (ZYG), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

OUTDOOR PTZ CAMERAS



MODEL#	WV-U65302-Z2 (Z2G)	WV-U65301-Z1 (Z1G)	WV-U65300-ZY (ZYG)
Environmental Type	Outdoor	Outdoor	Outdoor
Resolution	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	VMD	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.0 to 84.6 mm, F1.6	4.7 to 47.0 mm, F1.6	2.9 to 9 mm, F1.3
Optical Zoom	21x, Motorized	10x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	3.7° to 77° / Endless pan	6.7° to 62° / Endless pan	36° to 113° / 0-350 pan
Built-in IR-LED	—	—	—
Min. Illumination (Color / B&W)	0.011 lx / 0.006 lx 0.03 lx / 0.017 lx (Z2G)	0.011 lx / 0.006 lx 0.03 lx / 0.017 lx (Z1G)	0.007 lx / 0.004 lx 0.02 lx / 0.012 lx (ZYG)
WDR [Dynamic Range]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes [*2] / —	Yes / Yes [*2] / —	Yes / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-30 °C to +55 °C -22 °F to +131 °F	-30 °C to +55 °C -22 °F to +131 °F	-30 °C to +55 °C -22 °F to +131 °F
Power Source / Consumption	PoE+ / 12V DC [*2] 18.4W (PoE+)	PoE+ / 12V DC [*2] 18.4W (PoE+)	PoE / 12V DC [*2] 12W (PoE)
Other	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (Z2G), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (Z1G), Re-paintable	FIPS 140-2 LV3 [*1], NEMA TS2, Smoke dome (ZYG), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS

INDOOR PTZ CAMERAS



MODEL#	WV-S61702-Z3	WV-S61602-Z3	WV-S61302-Z4	WV-S61501-Z1	WV-S61301-Z2 WV-U61301-Z2
Environmental Type	Indoor	Indoor	Indoor	Indoor	Indoor
Resolution	8MP (4K)	6MP	2MP	5MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (2) / Auto tracking	Edge AI (3) / Auto tracking	Edge AI (2) / Auto tracking (S-series), VMD(U-series)
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.5 to 135 mm, F1.8	4.5 to 135 mm, F1.8	4.25 to 170 mm, F1.6	4.7 to 47.0 mm, F1.6	4.0 to 84.6 mm, F1.6
Optical Zoom	30x, Motorized	30x, Motorized	40x, Motorized	10x, Motorized	21x, Motorized
Horizontal angle of view (16:9)	2.5° to 62° / 0-350 pan	2.5° to 62° / 0-350 pan	1.9° to 66° / Endless pan	6.2° to 58° / 0-350 pan	3.7° to 77° / 0-350 Pan
Built-in IR-LED	—	—	—	—	—
Min. Illumination (Color / B&W)	0.13 lx / 0.1 lx	0.13 lx / 0.1 lx	0.011 lx / 0.006 lx	0.08 lx / 0.06 lx	0.011 lx / 0.006 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [144dB]	Yes [132dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	60 fps	30 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —
External I/O	Yes	Yes	Yes	Yes	Yes
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / —	— / —	— / —	— / —	— / —
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE+ / 12V DC 16.7W (PoE+)	PoE+ / 12V DC 16.7W (PoE+)	PoE / 12V DC 12.95W (PoE)	PoE / 12V DC 12.95W (PoE)	PoE / 12V DC 12.95W (PoE)
Other	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1]
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

INDOOR PTZ CAMERAS



MODEL#	WV-S61301-Z1	WV-S61300-ZY (ZYG)	WV-U61301-Z1	WV-U61300-ZY (ZYG)
Environmental Type	Indoor	Indoor	Indoor	Indoor
Resolution	2MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (2) / Auto tracking	Edge AI (2) / Auto tracking	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.7 to 47.0 mm, F1.6	2.9 to 9 mm, F1.3	4.7 to 47.0 mm, F1.6	2.9 to 9 mm, F1.3
Optical Zoom	10x, Motorized	3.1x, Motorized	10x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	6.7° to 62° / 0-350 pan	36° to 115° / 0-350 pan	6.7° to 62° / 0-350 pan	36° to 115° / 0-350 pan
Built-in IR-LED	—	—	—	—
Min. Illumination (Color / B&W)	0.011 lx / 0.006 lx	0.007 lx / 0.004 lx 0.02 lx / 0.012 lx (ZYG)	0.011 lx / 0.006 lx	0.007 lx / 0.004 lx 0.02 lx / 0.012 lx (ZYG)
WDR [Dynamic Range]	Yes [144dB]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —
External I/O	Yes	Yes	Yes	Yes
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / —	— / —	— / —	— / —
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE / 12V DC 12.95W (PoE)	PoE / 12V DC 12W (PoE)	PoE / 12V DC 12.95W (PoE)	PoE / 12V DC 12W (PoE)
Other	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1], Smoke dome (ZYG)	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1], Smoke dome (ZYG)
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

OUTDOOR DOME CAMERAS



MODEL#	WV-X25580-F2LN2	WV-X25700-V2LN	WV-X25600-V2LN	WV-X25500-V3LN	WV-X25300-V3LN
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	5MP	8MP(4K)	6MP	5MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning
Sensor	1/2.8 CMOS	1/1.8 CMOS	1/1.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	2.3 mm, F2.2	4.3 to 8.6 mm, F1.5	4.3 to 8.6 mm, F1.5	2.9 to 9 mm, F1.3	2.9 to 9 mm, F1.3
Optical Zoom	—	2x, Motorized	2x, Motorized	3.1x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	131°	52° to 101°	52° to 101°	33° to 103°	36° to 113°
Built-in IR-LED	21 m / 69 ft.	70 m / 230 ft.	70 m / 230 ft.	70 m / 230 ft.	70 m / 230 ft.
Min. Illumination (Color / B&W)	0.08 lx / 0 lx	0.04 lx / 0 lx	0.04 lx / 0 lx	0.03 lx / 0 lx	0.007 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / Yes	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP69, IP67, IP66 / IK11, 70J IP6K9K	IP67, IP66 / IK10, 50J	IP67, IP66 / IK10, 50J	IP67, IP66 / IK10, 50J	IP67, IP66 / IK10, 50J
Operating Temperature	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +55 °C -40 °F to +131 °F
Power Source / Consumption	PoE / 12V DC 11.5W (PoE)	PoE+ / 12V DC [*2] 14.0W (PoE+)	PoE+ / 12V DC [*2] 14.0W (PoE+)	PoE+ / 12V DC [*2] 14.0W (PoE+)	PoE+ / 12V DC [*2] 14.0W (PoE+)
Other	FIPS 140-2 LV3 [*1], ClearSight,	FIPS 140-2 LV3 [*1], ClearSight, Re-paintable	FIPS 140-2 LV3 [*1], ClearSight, Re-paintable	FIPS 140-2 LV3 [*1], ClearSight, Re-paintable	FIPS 140-2 LV3 [*1], ClearSight, Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

OUTDOOR DOME CAMERAS



MODEL#	WV-S25700-V2L (V2LN)(V2LG)(V2LN1)	WV-S25600-V2L (V2LN)(V2LG)	WV-S25500-V3L (V3LN)(V3LG)(V3LN1)
Environmental Type	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	6MP	5MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (3)
Sensor	1/1.8 CMOS	1/1.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.3 to 8.6 mm, F1.5	4.3 to 8.6 mm, F1.5	2.9 to 9 mm, F1.3
Optical Zoom	2x, Motorized	2x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	52° to 101°	52° to 101°	33° to 103°
Built-in IR-LED	70 m / 230 ft. 45 m / 148 ft. (V2LG)	70 m / 230 ft. 45 m / 148 ft. (V2LG)	55 m / 180 ft. 35 m / 115 ft. (V3LG)
Min. Illumination (Color / B&W)	0.04 lx / 0 lx 0.12 lx / 0 lx (V2LG)	0.04 lx / 0 lx 0.12 lx / 0 lx (V2LG)	0.05 lx / 0 lx 0.15 lx / 0 lx (V3LG)
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10, 50J	IP66 / IK10, 50J	IP66 / IK10, 50J
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F
Power Source / Consumption	PoE / 12V DC [*2] 11.5W (PoE)	PoE / 12V DC [*2] 11.5W (PoE)	PoE / 12V DC [*2] 11.5W (PoE)
Other	FIPS 140-2 LV3 [*1], ClearSight (V2LN) (V2LN1), Smoke dome (V2LG), Black (V2LN1), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (V2LN), Smoke dome (V2LG), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (V3LN) (V3LN1), Smoke dome (V3LG), Black (V3LN1), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS

OUTDOOR DOME CAMERAS



MODEL#	WV-S25500-F6L	WV-S25500-F3L	WV-S2536LA (LNA)(LGA)(LGNA)	WV-S2536LTA (LTNA)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	5MP	5MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (2)	Edge AI (2)
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	6.1 mm, F1.6	3.2 mm, F2.0	2.9 to 9 mm, F1.3	9 to 21 mm, F1.7
Optical Zoom	—	—	3.1x, Motorized	2.3x, Motorized
Horizontal angle of view (16:9)	48°	95°	36° to 113°	15° to 36°
Built-in IR-LED	45 m / 148 ft.	35 m / 115 ft.	70 m / 230 ft. 50 m / 164 ft. (LGA, LGNA)	70 m / 230 ft.
Min. Illumination (Color / B&W)	0.08 lx / 0 lx	0.12 lx / 0 lx	0.007 lx / 0 lx 0.018 lx / 0 lx (LGA)(LGNA)	0.011 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10, 50J	IP66 / IK10, 50J	IP66 / IK10, 50J	IP66 / IK10, 50J
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F
Power Source / Consumption	PoE / 12V DC [*2] 10.6W (PoE)	PoE / 12V DC [*2] 10.6W (PoE)	PoE / 12V DC [*2] 9.1W (PoE)	PoE / 12V DC [*2] 10.1W (PoE)
Other	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (LNA) (LGNA), Smoke dome (LGA) (LGNA), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (LTNA), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

OUTDOOR DOME CAMERAS



MODEL#	WV-U25751-V3L	WV-U25551-V3L	WV-U25550-F3L	WV-U2542LA	WV-U2540LA
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	5MP	5MP	4MP	4MP
Analytics (Max. # of AI apps installation)	AI-VMD	AI-VMD	AI-VMD	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.7 CMOS
Focal length / F-number	3.2 to 10.2 mm, F1.6	3.2 to 10.2 mm, F1.6	3.2 mm, F2.0	2.9 to 7.3 mm, F2.0	3.2 mm, F2.0
Optical Zoom	3.2x, Motorized	3.2x, Motorized	—	2.5x, Motorized	—
Horizontal angle of view (16:9)	30° to 110°	28° to 99°	96°	43° to 100°	100°
Built-in IR-LED	20 m / 65 ft.	20 m / 65 ft.	20 m / 65 ft.	20 m / 65 ft.	20 m / 65 ft.
Min. Illumination (Color / B&W)	0.2 lx / 0 lx	0.07 lx / 0 lx	0.11 lx / 0 lx	0.21 lx / 0 lx	0.21 lx / 0 lx
WDR [Dynamic Range]	Yes [120dB]	Yes [120dB]	Yes [120dB]	Yes [102dB]	Yes [102dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	15 fps	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*3] / Yes [*3] / —	— / — / —	— / — / —
External I/O	—	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F
Power Source / Consumption	PoE 9.6W	PoE 9.6W	PoE 9.6W	PoE 7.2W	PoE 5.3W
Other	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	—
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

OUTDOOR DOME CAMERAS



MODEL#	WV-U25351-V3L	WV-U25350-F3L	WV-U2532LA	WV-U2530LA
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	2MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	AI-VMD	AI-VMD	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/3 CMOS	1/3 CMOS
Focal length / F-number	3.2 to 10.2 mm, F1.6	3.2 mm, F2.0	2.9 to 7.3 mm, F2.0	3.2 mm, F2.0
Optical Zoom	3.2x, Motorized	—	2.5x, Motorized	—
Horizontal angle of view (16:9)	30° to 110°	105°	42° to 97°	97°
Built-in IR-LED	30 m / 98 ft.	30 m / 98 ft.	30 m / 98 ft.	30 m / 98 ft.
Min. Illumination (Color / B&W)	0.05 lx / 0 lx	0.07 lx / 0 lx	0.07 lx / 0 lx	0.07 lx / 0 lx
WDR [Dynamic Range]	Yes [120dB]	Yes [120dB]	Yes [120dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*3] / Yes [*3] / —	— / — / —	— / — / —
External I/O	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F
Power Source / Consumption	PoE 9.6W	PoE 9.6W	PoE 6.7W	PoE 4.8W
Other	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	—
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed. [*3] Option cable WV-QCA504 is needed.

INDOOR VANDAL DOME CAMERAS



MODEL#	WV-X22700-V2L	WV-X22600-V2L	WV-X22500-V3L	WV-X22300-V3L
Environmental Type	Indoor Vandal	Indoor Vandal	Indoor Vandal	Indoor Vandal
Resolution	8MP(4K)	6MP	5MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning
Sensor	1/1.8 CMOS	1/1.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.3 to 8.6 mm, F1.5	4.3 to 8.6 mm, F1.5	2.9 to 9 mm, F1.3	2.9 to 9 mm, F1.3
Optical Zoom	2x, Motorized	2x, Motorized	3.1x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	52° to 101°	52° to 101°	33° to 105°	36° to 114°
Built-in IR-LED	70 m / 230 ft.	70 m / 230 ft.	70 m / 230 ft.	70 m / 230 ft.
Min. Illumination (Color / B&W)	0.04 lx / 0 lx	0.04 lx / 0 lx	0.03 lx / 0 lx	0.007 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —
External I/O	Yes	Yes	Yes	Yes
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / IK10	— / IK10	— / IK10	— / IK10
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE+ / 12V DC 14.0W (PoE+)	PoE+ / 12V DC 14.0W (PoE+)	PoE+ / 12V DC 14.0W (PoE+)	PoE+ / 12V DC 14.0W (PoE+)
Other	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

INDOOR VANDAL DOME CAMERAS



MODEL#	WV-S22700-V2L (V2LG) (V2L1)	WV-S22600-V2L (V2LG)	WV-S22500-V3L (V3LG) (V3L1)	WV-S22500-F6L	WV-S22500-F3L	WV-S2236LA (LGA) (LA-B) (LGA-B)
Environmental Type	Indoor Vandal	Indoor Vandal	Indoor Vandal	Indoor Vandal	Indoor Vandal	Indoor Vandal
Resolution	8MP(4K)	6MP	5MP	5MP	5MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (2)
Sensor	1/1.8 CMOS	1/1.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.3 to 8.6 mm, F1.5	4.3 to 8.6 mm, F1.5	2.9 to 9 mm, F1.3	6.1 mm, F1.6	3.2 mm, F2.0	2.9 to 9 mm, F1.3
Optical Zoom	2x, Motorized	2x, Motorized	3.1x, Motorized	—	—	3.1x, Motorized
Horizontal angle of view (16:9)	52° to 101°	52° to 101°	33° to 105°	48°	95°	36° to 114°
Built-in IR-LED	50 m / 164 ft. 35 m / 115 ft. (V2LG)	50 m / 164 ft. 35 m / 115 ft. (V2LG)	40 m / 131 ft. 25 m / 82 ft. (V3LG)	35 m / 115 ft.	25 m / 82 ft.	70 m / 230 ft. 50 m / 164 ft. (LGA, LGA-B)
Min. Illumination (Color / B&W)	0.04 lx / 0 lx 0.12 lx / 0 lx (V2LG)	0.04 lx / 0 lx 0.12 lx / 0 lx (V2LG)	0.05 lx / 0 lx 0.15 lx / 0 lx (V3LG)	0.08 lx / 0 lx	0.12 lx / 0 lx	0.007 lx / 0 lx 0.018 lx / 0 lx (LGA) (LGA-B)
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	30 fps	30 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —
External I/O	Yes	Yes	Yes	Yes	Yes	Yes
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / IK10	— / IK10	— / IK10	— / IK10	— / IK10	— / IK10
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE / 12V DC 11.5W (PoE)	PoE / 12V DC 11.5W (PoE)	PoE / 12V DC 11.5W (PoE)	PoE / 12V DC 10.6W (PoE)	PoE / 12V DC 10.6W (PoE)	PoE / 12V DC 8.7W (PoE)
Other	FIPS 140-2 LV3 [*1], Smoke dome (V2LG), Black (V2L1), Re-paintable	FIPS 140-2 LV3 [*1], Smoke dome (V2LG), Re-paintable	FIPS 140-2 LV3 [*1], Smoke dome (V3LG), Black (V3L1), Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Smoke dome (LGA) (LGA-B), Black (LA-B) (LGA-B), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded.

INDOOR VANDAL DOME CAMERAS



COMING SOON



COMING SOON



COMING SOON

MODEL#	WV-U22750-F3L	WV-U22550-F3L	WV-U22350-F3L
Environmental Type	Indoor Vandal	Indoor Vandal	Indoor Vandal
Resolution	8MP(4K)	5MP	2MP
Analytics (Max. # of AI apps installation)	AI-VMD	AI-VMD	AI-VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	3.2 mm, F2.0	3.2 mm, F2.0	3.2 mm, F2.0
Optical Zoom	—	—	—
Horizontal angle of view (16:9)	105°	96°	105°
Built-in IR-LED	20 m / 65 ft.	20 m / 65 ft.	30 m / 98 ft.
Min. Illumination (Color / B&W)	0.31 lx / 0 lx	0.11 lx / 0 lx	0.07 lx / 0 lx
WDR [Dynamic Range]	Yes [120dB]	Yes [120dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	15 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP42 / IK10	IP42 / IK10	IP42 / IK10
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE 9.6W	PoE 9.6W	PoE 9.6W
Other	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)
Bracket Chart	BRACKETS	BRACKETS	BRACKETS

INDOOR DOME CAMERAS



COMING SOON



MODEL#	WV-S2136LA (LGA)(LA-B)(LGA-B)	WV-S2136A (-B)(GA)(GA-B)	WV-U21550-V3L	WV-U2142LA	WV-U2140LA
Environmental Type	Indoor	Indoor	Indoor	Indoor	Indoor
Resolution	2MP	2MP	5MP	4MP	4MP
Analytics (Max. # of AI apps installation)	Edge AI (2)	Edge AI (2)	AI-VMD	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.7 CMOS
Focal length / F-number	2.9 to 9 mm, F1.3	2.9 to 9 mm, F1.3	3.2 to 10.2 mm, F1.6	2.9 to 7.3 mm, F2.0	3.2 mm, F2.0
Optical Zoom	3.1x, Motorized	3.1x, Motorized	3.2x, Motorized	2.5x, Motorized	—
Horizontal angle of view (16:9)	36° to 115°	36° to 115°	28° to 101°	44° to 102°	100°
Built-in IR-LED	70 m / 230 ft. 50 m / 164 ft. (LGA, LGA-B)	—	20 m / 65 ft.	20 m / 65 ft.	20 m / 65 ft.
Min. Illumination (Color / B&W)	0.007 lx / 0 lx 0.018 lx / 0 lx (LGA) (LGA-B)	0.007 lx / 0.006 lx 0.018 lx / 0.017 lx (GA) (GA-B)	0.07 lx / 0 lx	0.21 lx / 0 lx	0.21 lx / 0 lx
WDR [Dynamic Range]	Yes [144dB]	Yes [144dB]	Yes [120dB]	Yes [102dB]	Yes [102dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / —	— / — / —	— / — / —
External I/O	Yes	Yes	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / —	— / —	IP42 / —	— / —	— / —
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE / 12V DC 8.7W (PoE)	PoE / 12V DC 8.7W (PoE)	PoE 9.6W	PoE 6.5W	PoE 5.3W
Other	FIPS 140-2 LV3 [*1], Smoke dome (LGA) (LGA-B), Black (LA-B) (LGA-B)	FIPS 140-2 LV3 [*1], Smoke dome (GA) (GA-B), Black (-B) (GA-B)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	—
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA504 is needed.

INDOOR DOME CAMERAS



COMING SOON



MODEL#	WV-U21350-V3L	WV-U21300-V2L	WV-U2132LA	WV-U2130LA
Environmental Type	Indoor	Indoor	Indoor	Indoor
Resolution	2MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	AI-VMD	VMD	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/3 CMOS	1/3 CMOS
Focal length / F-number	3.2 to 10.2 mm, F1.6	2.9 to 7.3 mm, F2.0	2.9 to 7.3 mm, F2.0	3.2 mm, F2.0
Optical Zoom	3.2x, Motorized	2.5x, Motorized	2.5x, Motorized	—
Horizontal angle of view (16:9)	30° to 112°	42° to 97°	42° to 97°	97°
Built-in IR-LED	30 m / 98 ft.	40 m / 131 ft.	40 m / 131 ft.	30 m / 98 ft.
Min. Illumination (Color / B&W)	0.05 lx / 0 lx	0.07 lx / 0 lx	0.07 lx / 0 lx	0.07 lx / 0 lx
WDR [Dynamic Range]	Yes [120dB]	Yes [120dB]	Yes [120dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	— / — / Yes	— / — / —	— / — / —
External I/O	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP42 / —	— / —	— / —	— / —
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE 9.6W	PoE 5.8W	PoE 5.8W	PoE 4.8W
Other	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	—	—
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

BULLET CAMERAS



MODEL#	WV-X15701-Z3L (Z3LN)	WV-X15700-V2L (V2LN)	WV-X15600-V2L (V2LN)	WV-X15502-Z1L (Z1LN)	WV-X15501-Z3L (Z3LN)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	8MP(4K)	6MP	5MP	5MP
Analytics (Max. # of AI apps installation)	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning	Edge AI (9) / AI relay / On-site learning
Sensor	1/2.8 CMOS	1/1.8 CMOS	1/1.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.5 to 135 mm, F1.8	4.3 to 8.6 mm, F1.5	4.3 to 8.6 mm, F1.5	4.7 to 47 mm, F1.6	4.5 to 135 mm, F1.8
Optical Zoom	30x, Motorized	2x, Motorized	2x, Motorized	10x, Motorized	30x, Motorized
Horizontal angle of view (16:9)	2.5° to 62°	53° to 104°	53° to 104°	6.1° to 58°	2.3° to 58°
Built-in IR-LED	140 m / 459 ft. (PoE++)	70 m / 230 ft.	70 m / 230 ft.	180 m / 591 ft. (PoE++)	180 m / 591 ft. (PoE++)
Min. Illumination (Color / B&W)	0.13 lx / 0 lx	0.04 lx / 0 lx	0.04 lx / 0 lx	0.04 lx / 0 lx	0.06 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +60 °C -40 °F to +140 °F (PoE++)
Power Source / Consumption	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE+ / 12V DC [*2] 14.0W (PoE+)	PoE+ / 12V DC [*2] 14.0W (PoE+)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)
Other	FIPS 140-2 LV3 [*1], ClearSight (Z3LN)	FIPS 140-2 LV3 [*1], ClearSight (V2LN), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (V2LN), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (Z1LN), LFP for LPR	FIPS 140-2 LV3 [*1], ClearSight (Z3LN)
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

BULLET CAMERAS



MODEL#	WV-X15501-Z1L (Z1LN)	WV-X15500-V3L (V3LN)	WV-X15302-Z1L (Z1LN)	WV-X15301-Z1L (Z1LN)	WV-X15300-V3L (V3LN)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	5MP	5MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (9)	Edge AI (9) / AI relay / On-site learning	Edge AI (9)	Edge AI (9)	Edge AI (9) / AI relay / On-site learning
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.7 to 47 mm, F1.6	2.9 to 9 mm, F1.3	4.7 to 47 mm, F1.6	4.7 to 47 mm, F1.6	2.9 to 9 mm, F1.3
Optical Zoom	10x, Motorized	3.1x, Motorized	10x, Motorized	10x, Motorized	3.1x, Motorized
Horizontal angle of view (16:9)	6.1° to 58°	34° to 106°	6.6° to 62°	6.6° to 62°	37° to 117°
Built-in IR-LED	180 m / 591 ft. (PoE++)	70 m / 230 ft.	250 m / 820 ft. (PoE++)	250 m / 820 ft. (PoE++)	70 m / 230 ft.
Min. Illumination (Color / B&W)	0.04 lx / 0 lx	0.03 lx / 0 lx	0.011 lx / 0 lx	0.011 lx / 0 lx	0.007 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	60 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +55 °C -40 °F to +131 °F	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +55 °C -40 °F to +131 °F
Power Source / Consumption	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE+ / 12V DC [*2] 14.0W (PoE+)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE+ / 12V DC [*2] 14.0W (PoE+)
Other	FIPS 140-2 LV3 [*1], ClearSight (Z1LN)	FIPS 140-2 LV3 [*1], ClearSight (V3LN), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (Z1LN), LPF for LPR	FIPS 140-2 LV3 [*1], ClearSight (Z1LN)	FIPS 140-2 LV3 [*1], ClearSight (V3LN), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

BULLET CAMERAS



MODEL#	WV-S15701-Z3L (Z3LN)	WV-S15700-V2L (V2LN) (V2LK)	WV-S15600-V2L (V2LN)	WV-S15501-Z3L (Z3LN)	WV-S15501-Z1L (Z1LN)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	8MP(4K)	6MP	5MP	5MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (3)
Sensor	1/2.8 CMOS	1/1.8 CMOS	1/1.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	4.5 to 135 mm, F1.8	4.3 to 8.6 mm, F1.5	4.3 to 8.6 mm, F1.5	4.5 to 135 mm, F1.8	4.7 to 47 mm, F1.6
Optical Zoom	30x, Motorized	2x, Motorized	2x, Motorized	30x, Motorized	10x, Motorized
Horizontal angle of view (16:9)	2.5° to 62°	53° to 104°	53° to 104°	2.3° to 58°	6.1° to 58°
Built-in IR-LED	140 m / 459 ft. (PoE++)	70 m / 230 ft.	70 m / 230 ft.	180 m / 591 ft. (PoE++)	180 m / 591 ft. (PoE++)
Min. Illumination (Color / B&W)	0.13 lx / 0 lx	0.04 lx / 0 lx 0.04 lx / 0.03 lx (V2LK)	0.04 lx / 0 lx	0.06 lx / 0 lx	0.04 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [132dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP67, IP66 / IK10	IP66 / IK10	IP66 / IK10	IP67, IP66 / IK10	IP67, IP66 / IK10
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +60 °C -40 °F to +140 °F (PoE++)
Power Source / Consumption	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE / 12V DC [*2] 11.5W (PoE)	PoE / 12V DC [*2] 11.5W (PoE)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)
Other	FIPS 140-2 LV3 [*1], ClearSight (Z3LN)	FIPS 140-2 LV3 [*1], ClearSight (V2LN) (V2LK), Re-paintable, Salt resistant (V2LK)	FIPS 140-2 LV3 [*1], ClearSight (V2LN), Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (Z3LN)	FIPS 140-2 LV3 [*1], ClearSight (Z1LN)
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

BULLET CAMERAS



MODEL#	WV-S15500-V3L (V3LN)(V3LN1)(V3LK)	WV-S15500-F6L	WV-S15500-F3L	WV-S15301-Z1L (Z1LN)	WV-S1536LA(LA-B) (LNA)(LNA-B)(LNSA)	WV-S1536LTA (LTNA)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	5MP	5MP	5MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (2)	Edge AI (2)
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	2.9 to 9 mm, F1.3	6.1 mm, F1.6	3.2 mm, F2.0	4.7 to 47 mm, F1.6	2.9 to 9 mm, F1.3	9 to 21 mm, F1.7
Optical Zoom	3.1x, Motorized	—	—	10x, Motorized	3.1x, Motorized	2.3x, Motorized
Horizontal angle of view (16:9)	34° to 106°	49°	98°	6.6° to 62°	37° to 117°	15° to 36°
Built-in IR-LED	55 m / 180 ft.	45 m / 148 ft.	35 m / 115 ft.	250 m / 820 ft. (PoE++)	70 m / 230 ft.	70 m / 230 ft.
Min. Illumination (Color / B&W)	0.05 lx / 0 lx	0.08 lx / 0 lx	0.12 lx / 0 lx	0.011 lx / 0 lx	0.007 lx / 0 lx	0.011 lx / 0 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [132dB]	Yes [132dB]	Yes [144dB]	Yes [144dB]	Yes [144dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	60 fps	60 fps	60 fps
Audio (In / Out / Built-in MIC)	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —	Yes [*2] / Yes [*2] / —
External I/O	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]	Yes [*2]
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP67, IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F (PoE++)	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F
Power Source / Consumption	PoE / 12V DC [*2] 11.5W (PoE)	PoE / 12V DC [*2] 10.6W (PoE)	PoE / 12V DC [*2] 10.6W (PoE)	PoE++ / PoE+ / 12V DC [*2] 32.4W (PoE++)	PoE / 12V DC [*2] 9.1W (PoE)	PoE / 12V DC [*2] 10.6W (PoE)
Other	FIPS 140-2 LV3 [*1], ClearSight (V3LN)(V3LN1) (V3LK), Black (V3LN1), Re-paintable, Salt resistant (V3LK)	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], Re-paintable	FIPS 140-2 LV3 [*1], ClearSight (Z1LN)	FIPS 140-2 LV3 [*1], ClearSight (LNA) (LNA-B) (LNSA), Black (LA-B) (LNA-B), Re-paintable, Salt resistant (LNSA)	FIPS 140-2 LV3 [*1], ClearSight (LTNA), Re-paintable
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

BULLET CAMERAS



COMING SOON



COMING SOON



COMING SOON



MODEL#	WV-U15750-V3L	WV-U15550-V3L	WV-U1542LA	WV-U15350-V3L	WV-U1532LA
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	8MP(4K)	5MP	4MP	2MP	2MP
Analytics (Max. # of AI apps installation)	AI-VMD	AI-VMD	VMD	AI-VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.8 CMOS	1/3 CMOS
Focal length / F-number	3.2 to 10.2 mm, F1.6	3.2 to 10.2 mm, F1.6	2.9 to 7.3 mm, F2.0	3.2 to 10.2 mm, F1.6	2.9 to 7.3 mm, F2.0
Optical Zoom	3.2x, Motorized	3.2x, Motorized	2.5x, Motorized	3.2x, Motorized	2.5x, Motorized
Horizontal angle of view (16:9)	31° to 114°	28° to 102°	44° to 103°	31° to 114°	43° to 100°
Built-in IR-LED	20 m / 65 ft.	20 m / 65 ft.	20 m / 65 ft.	30 m / 98 ft.	30 m / 98 ft.
Min. Illumination (Color / B&W)	0.2 lx / 0 lx	0.07 lx / 0 lx	0.21 lx / 0 lx	0.05 lx / 0 lx	0.07 lx / 0 lx
WDR [Dynamic Range]	Yes [120dB]	Yes [120dB]	Yes [102dB]	Yes [120dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	15 fps	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	— / — / —	Yes / Yes / —	— / — / —
External I/O	—	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F
Power Source / Consumption	PoE 9.6W	PoE 9.6W	PoE 7.2W	PoE 9.6W	PoE 6.7W
Other	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded. [*2] Option cable WV-QCA501A is needed.

BOX CAMERAS



MODEL#	WV-S1136A	WV-U11550-V3	WV-U1142A	WV-U11350-V3	WV-U11300-V2	WV-U1132A	WV-U1130A
Environmental Type	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Resolution	2MP	5MP	4MP	2MP	2MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (2)	AI-VMD	VMD	AI-VMD	VMD	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.8 CMOS	1/2.8 CMOS	1/3 CMOS	1/3 CMOS
Focal length / F-number	CS Mount *Lens is not included	3.2 to 10.2 mm, F1.6	2.9 to 7.3 mm, F2.0	3.2 to 10.2 mm, F1.6	2.9 to 7.3 mm, F2.0	2.9 to 7.3 mm, F2.0	3.2 mm, F2.0
Optical Zoom	—	3.2x, Motorized	2.5x, Motorized	3.2x, Motorized	2.5x, Motorized	2.5x, Motorized	—
Horizontal angle of view (16:9)	—	28° to 102°	44° to 103°	31° to 114°	43° to 100°	43° to 100°	100°
Built-in IR-LED	—	—	—	—	—	—	—
Min. Illumination (Color / B&W)	0.006 lx / 0.004 lx @F1.2	0.07 lx / 0.04 lx	0.21 lx / 0.12 lx	0.05 lx / 0.03 lx	0.07 lx / 0.04 lx	0.07 lx / 0.04 lx	0.07 lx / 0.04 lx
WDR [Dynamic Range]	Yes [144dB]	Yes [120dB]	Yes [102dB]	Yes [120dB]	Yes [120dB]	Yes [120dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	60 fps	30 fps	30 fps	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	— / — / —	Yes / Yes / —	— / — / Yes	— / — / —	— / — / —
External I/O	Yes	—	—	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / —	— / —	— / —	— / —	— / —	— / —	— / —
Operating Temperature	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE / 12V DC 6.3W (PoE)	PoE 6.7W	PoE 4.8W	PoE 6.7W	PoE 4.3W	PoE 4.3W	PoE 3.8W
Other	FIPS 140-2 LV3 [*1]	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	FIPS 140-3 LV3 [*1], Re-paintable (TBD)	—	—	—
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

FISHEYE CAMERAS



MODEL#	WV-S4576LA WV-S4576LMA	WV-S4556LA WV-S4556LMA	WV-S4176A	WV-S4156A
Environmental Type	Outdoor	Outdoor	Indoor	Indoor
Resolution	12MP	5MP	12MP	5MP
Analytics (Max. # of AI apps installation)	Edge AI (3)	Edge AI (3)	Edge AI (3)	Edge AI (3)
Sensor	1/2 CMOS	1/3 CMOS	1/2 CMOS	1/3 CMOS
Focal length / F-number	1.4 mm, F1.9	0.84 mm, F2.4	1.4 mm, F1.9	0.84 mm, F2.4
Optical Zoom	—	—	—	—
Horizontal angle of view (16:9)	183°	186°	183°	186°
Built-in IR-LED	14 m / 46 ft.	14 m / 46 ft.	—	—
Min. Illumination (Color / B&W)	0.2 lx / 0 lx	0.11 lx / 0 lx	0.2 lx / 0.2 lx	0.11 lx / 0.1lx
WDR [Dynamic Range]	Yes [84dB]	Yes [120dB]	Yes [84dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	Yes / Yes / —	Yes / Yes / —	Yes / Yes / Yes	Yes / Yes / Yes
External I/O	Yes	Yes	Yes	Yes
SD Memory Card Slot	SDXC	SDXC	SDXC	SDXC
Weather / Vandal Resistant	IP66 / IK10, 50J	IP66 / IK10, 50J	— / —	— / —
Operating Temperature	-40 °C to +60 °C -40 °F to +140 °F	-40 °C to +60 °C -40 °F to +140 °F	-10 °C to +50 °C +14 °F to +122 °F	-10 °C to +50 °C +14 °F to +122 °F
Power Source / Consumption	PoE / 12V DC 12.95W (PoE)	PoE / 12V DC 12.5W (PoE)	PoE / 12V DC 8.6W (PoE)	PoE / 12V DC 6.7W (PoE)
Other	FIPS 140-2 LV3 [*1], Re-paintable, Railway Application / M12 connector (S4576LMA)	FIPS 140-2 LV3 [*1], Re-paintable, Railway Application / M12 connector (S4556LMA)	FIPS 140-2 LV3 [*1]	FIPS 140-2 LV3 [*1]
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded.

OUTDOOR COMPACT CAMERAS



MODEL#	WV-X35402-F2L (F2LM) WV-S35402-F2L (F2LG)(F2L1)	WV-X35302-F2L (F2LM) WV-S35302-F2L (F2LG)(F2L1)	WV-U35401-F2L (F2LG)	WV-U35301-F2L (F2LG)
Environmental Type	Outdoor	Outdoor	Outdoor	Outdoor
Resolution	4MP	2MP	4MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (1)	Edge AI (2)	VMD	VMD
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.8 CMOS
Focal Length / F-number	2.4 mm, F2.1	2.4 mm, F2.1	2.4 mm, F2.1	2.4 mm, F2.1
Optical Zoom	—	—	—	—
Horizontal Angle of View (16:9)	121°	132°	128°	123°
Built-in IR-LED	14 m / 46 ft. 10 m / 33 ft. (F2LG)	21 m / 69 ft. 15 m / 49 ft. (F2LG)	14 m / 46 ft. 10 m / 33 ft. (F2LG)	21 m / 69 ft. 15 m / 49 ft. (F2LG)
Min. Illumination (Color / B&W)	0.07 lx / 0 lx 0.19 lx / 0 lx (F2LG)	0.02 lx / 0 lx 0.05 lx / 0 lx (F2LG)	0.24 lx / 0 lx 0.66 lx / 0 lx (F2LG)	0.08 lx / 0 lx 0.22 lx / 0 lx (F2LG)
WDR [Dynamic Range]	Yes [132dB]	Yes [144dB]	Yes [102dB]	Yes [120dB]
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	60 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	— / — / Yes	— / — / Yes	— / — / Yes	— / — / Yes
External I/O	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10
Operating Temperature	-40 °C to +60 °C (X-series) -40 °F to +140 °F (X-series) -40 °C to +50 °C (S-series) -40 °F to +122 °F (S-series)	-40 °C to +60 °C (X-series) -40 °F to +140 °F (X-series) -40 °C to +50 °C (S-series) -40 °F to +122 °F (S-series)	-30 °C to +50 °C -22 °F to +122 °F	-30 °C to +50 °C -22 °F to +122 °F
Power Source / Consumption	PoE 8.6W (PoE)	PoE 8.6W (PoE)	PoE 8.6W (PoE)	PoE 8.6W (PoE)
Other	FIPS 140-2 LV3 [*1], Railway standards (X-series), M12 connector (F2LM), Smoke dome (F2LG), Black (F2L1)	FIPS 140-2 LV3 [*1], Railway standards (X-series), M12 connector (F2LM), Smoke dome (F2LG), Black (F2L1)	Smoke dome (F2LG)	Smoke dome (F2LG)
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS

INDOOR COMPACT CAMERAS



MODEL#	WV-S32402-F2L (F2LG) (F2L1)	WV-S32302-F2L (F2LG) (F2L1)	WV-U31401-F2L (F2LG)	WV-U31301-F2L (F2LG)	WV-S71300A-F3
Environmental Type	Indoor Vandal	Indoor Vandal	Indoor	Indoor	Indoor
Resolution	4MP	2MP	4MP	2MP	2MP
Analytics (Max. # of AI apps installation)	Edge AI (1)	Edge AI (2)	VMD	VMD	Edge AI (3)
Sensor	1/2.8 CMOS	1/2.8 CMOS	1/2.7 CMOS	1/2.8 CMOS	1/2.8 CMOS
Focal length / F-number	2.4 mm, F2.1	2.4 mm, F2.1	2.4 mm, F2.1	2.4 mm, F2.1	3.2 mm, F2.0
Optical Zoom	—	—	—	—	—
Horizontal angle of view (16:9)	121°	132°	128°	123°	81.1°
Built-in IR-LED	14 m / 46 ft. 10 m / 33 ft. (F2LG)	21 m / 69 ft. 15 m / 49 ft. (F2LG)	14 m / 46 ft. 10 m / 33 ft. (F2LG)	21 m / 69 ft. 15 m / 49 ft. (F2LG)	—
Min. Illumination (Color / B&W)	0.07 lx / 0 lx 0.19 lx / 0 lx (F2LG)	0.02 lx / 0 lx 0.05 lx / 0 lx (F2LG)	0.24 lx / 0 lx 0.66 lx / 0 lx (F2LG)	0.08 lx / 0 lx 0.22 lx / 0 lx (F2LG)	0.21 lx / 0.2 lx
WDR [Dynamic Range]	Yes [132dB]	Yes [144dB]	Yes [102dB]	Yes [120dB]	—
Video Codec	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding	H.265 Smart Coding
Max. fps @Max. Resolution	30 fps	60 fps	30 fps	30 fps	30 fps
Audio (In / Out / Built-in MIC)	— / — / Yes	— / — / Yes	— / — / Yes	— / — / Yes	— / — / Yes
External I/O	—	—	—	—	—
SD Memory Card Slot	microSDXC	microSDXC	microSDXC	microSDXC	microSDXC
Weather / Vandal Resistant	— / IK10	— / IK10	— / —	— / —	IP44 / —
Operating Temperature	0 °C to +40 °C +32 °F to +104 °F	0 °C to +40 °C +32 °F to +104 °F	0 °C to +40 °C +32 °F to +104 °F	0 °C to +40 °C +32 °F to +104 °F	-10 °C to +40 °C +14 °F to +104 °F
Power Source / Consumption	PoE 8.6W (PoE)	PoE 8.6W (PoE)	PoE 8.6W (PoE)	PoE 8.6W (PoE)	PoE / USB Type-C 8.2W (PoE)
Other	FIPS 140-2 LV3 [*1], Smoke dome (F2LG), Black (F2L1)	FIPS 140-2 LV3 [*1], Smoke dome (F2LG), Black (F2L1)	Smoke dome (F2LG)	Smoke dome (F2LG)	FIPS 140-2 LV3 [*1], USB I/F for setting thru Wi-Fi
Bracket Chart	BRACKETS	BRACKETS	BRACKETS	BRACKETS	BRACKETS

[*1] FIPS-certified secure element is embedded.

[illegible]

NVR WJ-NX310 / NX410 / NX510 Series

NX Series Features

- Secure high-bandwidth recording
- High reliability and redundancy
- Scalable storage
- High security
 - GlobalSign® certificates pre-installed
 - FIPS 140-2 LV3 [*1]
- Onvif/RTSP supported
- Remote Monitoring

[*1] FIPS 140-2 level 3-certified secure element is embedded



WJ-NX310 Recorder



WJ-NX410 / NX510 Recorder



NVRs



MODEL#		WJ-NX310	WJ-NX410	WJ-NX510	WJ-HXE410
Type		NETWORK VIDEO RECORDERS			HDD Extension Unit
Video Compression		H.265 / H.264 / JPEG			
Camera Channel	Default / Max	16 ch / 32 ch	32 ch / 64 ch	64 ch / 128 ch	—
PoE port		—			
Throughput	Recording / Output	256 Mbps / 256 Mbps	384 Mbps / 256 Mbps		—
Max HDD		4 HDDs	9 HDDs (Main Unit) 54 HDDs (with 5 x WJ-HXE410)		9 HDDs
Max HDD capacity for each SATA		Up to 18TB			
RAID		RAID 1	RAID 1, 5, 6		
Monitor Output		2 x HDMI (4K)			—
Alarm Port		9 inputs / 1 output	32 inputs / 4 outputs		—
Simultaneous User Access		Max 16 users			—
Network Interface		2 x 1000BASE-T	2 x 1000BASE-T, 1 x 100BASE-TX (for maintenance)		—
Operating Temperature		0°C to +45°C / +32°F to +113°F			
Dimensions (inch)		(W)420 x (D)370 x (H)88(mm) (W)16-17/32 x (D)14-9/16 x (H)3-15/32(inches)	(W)430 x (D)413 x (H)132(mm) (W)16-15/16 x (D)16-1/4 x (H)5-3/16(inches)		(W)430 x (D)416 x (H)132(mm) (W)16-15/16 x (D)16-3/8 x (H)5-3/16(inches)
Weight		7 kg /15.4 lbs. (no HDD)	11.5 kg / 25.4 lbs. (no HDD)		11.0 kg / 24.3 lbs. (no HDD)
Standard Accessory		Rack mount			

OPTIONAL ACCESSORIES

		FOR WJ-NX310	FOR WJ-NX410	FOR WJ-NX510	FOR WJ-HXE410	
HDD						
		CANISTER-NX3/8TB (8TB)	CANISTER-NX4/8TB (8TB)			
		CANISTER-NX3/18TB (18TB)	CANISTER-NX4/18TB (18TB)			
HDD Extension Unit		—	WJ-HXE410		—	
Additional License	Camera CH Kit	WJ-NXE32W (8 camera license)	WJ-NXE42W (32 camera license)	WJ-NXE52W (32 camera license)	—	
		WJ-NXE33W (16 camera license)		WJ-NXE53W (64 camera license)		
	Data Encryption Kit	WJ-NXS01W (1 camera) / WJ-NXS04W (4 cameras) / WJ-NXS16W (16 cameras) / WJ-NXS32W (32 cameras)			—	

NVR with a build-in PoE+ switch WJ-NU101 / 201 / 300 / 301 Series

NU Series Features

- NVR with a build-in PoE+ switch
- Easy installation
- Scalable Storage
- Perfectly adapted to i-PRO AI products
- High security
 - GlobalSign® certificates pre-installed
 - FIPS 140-2 LV3 [*1]
- Connectivity
 - RTSP supported
- Remote monitoring

[*1] FIPS 140-2 level 3-certified secure element is embedded



WJ-NU301 Recorder



WJ-NU101 / 201 / 300 Recorder



NVR with a build-in PoE+ switch



MODEL#		WJ-NU101		WJ-NU201		WJ-NU300		WJ-NU301	
		NVR WITH A BUILD-IN POE+ SWITCH							
Video Compression		H.265 / H.264 / JPEG							
Max Camera Channel		4 ch		8 ch		16 ch			
Video Throughput	Recording / Output	48Mbps/48Mbps		64Mbps/64Mbps		128Mbps/128Mbps			
HDD slot		1 HDD (Main Unit)					2 HDDs (Main Unit)		
Max HDD capacity for each SATA		Up to 20 TB							
Network Interface		4x 10BASE-T 100BASE-TX (RJ45, PoE+)	1 x 10BASE-T 100BASE-TX 1000BASE-T (RJ45)	8x 10BASE-T 100BASE-TX (RJ45, PoE+)	1 x 10BASE-T 100BASE-TX 1000BASE-T (RJ45)	8x 10BASE-T 100BASE-TX (RJ45, PoE+)	1 x 10BASE-T 100BASE-TX 1000BASE-T (RJ45)	16x 10BASE-T 100BASE-TX (RJ45, PoE+)	1 x 10BASE-T 100BASE-TX 1000BASE-T (RJ45)
PoE budget		4 port Total Max 50W Each port Max:30W		8 port Total Max 110W Each port Max:30W			16port Total Max 233W Each port Max:30W		
RAID		—					RAID1		
Monitor Output		2 x HDMI (1x 4K, 1x Full HD)							
Alarm port		In:4 / out:1 (Additional General purpose I/O :2)							
Simultaneous User Access		Max 16 users							
Operating temperature		0°C to +45°C / +32°F to +113°F							
Dimensions (inch)		(W)340 x (D)230 x (H)44(mm) (W)13-3/8 x (D)9-1/16 x (H)1-23/32(inches)						(W)420 x (D)300 x (H)88(mm) (W)16-17/32 x (D)11-13/16 x (H)3-15/32(inches)	
Weight		2.1 kg / 4.6 lbs						4.7 kg / 10.4 lbs	

OPTIONAL ACCESSORIES

	FOR WJ-NU101	FOR WJ-NU201	FOR WJ-NU300	FOR WJ-NU301
Vertical Mount	WV-QRM001			
Rack Mount	WV-QRM101			WV-QRM201
Wall Mount	WV-QRM201			

Management Software

i-PRO Management Software

WV-ASM300W

Extension Software

WV-ASE202W / WV-ASE203W / WV-ASE205W

Easy setting: New WV-ASM300W software enable a whole setting from camera configuration to recorder configuration.

- Up to 100 recorders, 64 encoders and 256 directly connected cameras can be registered. Up to 6,400 cameras registered in the recorders and 256 cameras registered in the encoders are automatically registered in the WV-ASM300W (the number of the cameras depends on the recorder and encoder).
- Encryption of SSL and data encryption support latest "AES-256bit key" strong encryption.
- MP4 data direct download from WJ-NX310,NX410,NX510,NU101,NU201,NU300,NU301.
- When used with WJ-NX310,NX410,NX510,NU101,NU201,NU300,NU301, VMD, thumbnail search can be operated.
- Selecting the camera icon in map window, a still image of the camera is overlaid.
- Live window, Map window in addition to the Operation window (3 monitors).
- Control using the System Controller WV-CU980
https://i-pro.com/products_and_solutions/en/surveillance/products/wv-cu980
- 3D Dewarp: virtual PTZ operations for better operability and monitoring experience.

*To use the multi-monitor function, it is necessary to install an additional video card on the PC in use.



*monitor displays are optional.

Optional software

WV-ASE202W

- Expand the maximum numbers of screens to 64.
- Up to 4 live windows.
- Multi-monitor function using up to 6 PC monitors.
- To display the operation window, the map window and the 4 map windows simultaneously.

WV-ASE203W

- Expand the maximum numbers of registered recorders, encoders and cameras to 100, 64 and 256 respectively.
- Up to 4 licenses for the WV-ASE203W can be added.

WV-ASE205W

- Visibility Enhancement Function.

Spatial Tonal Correction

Snowfall and Rainfall Noise Reduction

Multi-frame Synthesis Noise Reduction

i-PRO Mobile APP

Applications for Smartphone/Tablet



Supported OS:
Android™ OS 10.0 or later
iOS 14.0 or later
(As of April 1, 2025)



Overview

i-PRO Mobile APP is a smartphone application that can view the images of the following i-PRO devices.

- Network cameras
- Network interface units
- Digital disk recorders
- Network disk recorders

Functions

- Check live video
- Control live video
- Play recorded video
- Download playback video
- Check statistics in a graph
- Alarm notification

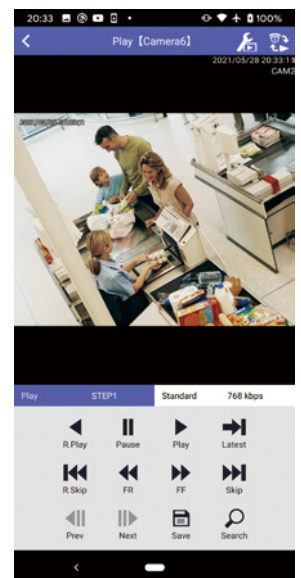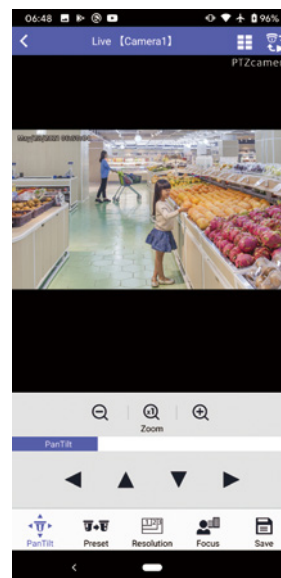

For Android



For iOS



Accessories

i-PRO SD MEMORY CARDS



MODEL#	WV-SDA032G	WV-SDA064G	WV-SDA128G	WV-SDA256G	WV-SDA512G
Type	SDHC	SDXC	SDXC	SDXC	SDXC
Storage	32 GB	64 GB	128 GB	256 GB	512 GB

i-PRO MICRO SD MEMORY CARDS



MODEL#	WV-SDB032G	WV-SDB064G	WV-SDB128G	WV-SDB256G
Type	microSDHC	microSDXC	microSDXC	microSDXC
Storage	32 GB	64 GB	128 GB	256 GB

MICROPHONE



MODEL#	WV-PM500
Directionality	Non-directional
Power	Plug-in power type, 1.5 VDC to 5 VDC, Max. current: 300 uA
Terminal / Cable	3.5 mm stereo mini plug (L ch monaural) Cable length: 2.6 m / 8.53 ft.
Operating Temperature	-20 °C to +60 °C / -4 °F to +140 °F
Dust and Water Resistant	IP65

POE INJECTOR



MODEL#	WJ-PU201/G	WJ-PU201F/G
Power Input	100 to 240V AC	100 to 240V AC
Max. Power output	60W @ -10 °C to +40 °C, 60W @ +14°F to +104 °F 30W @ -10 °C to +50 °C, 30W @ +14°F to +122 °F	60W @ -10 °C to +40 °C, 60W @ +14°F to +104 °F 30W @ -10 °C to +50 °C, 30W @ +14°F to +122 °F
Network Interface	10BASE-T/100BASE-TX/1000BASE-T, RJ45 connector (x2)	10BASE-T/100BASE-TX/1000BASE-T, RJ45 connector (x2) Standard SFP module port (LC type) (x1)
IEEE Standards	IEEE802.3bt/at/af	IEEE802.3bt/at/af
Dimensions	(W) 65 mm x (D) 163 mm x (H) 36 mm (W) 2-9/16 x (D) 6-13/32 (inches) x (H) 1-13/32 (inches)	(W) 80 mm x (D) 184 mm x (H) 50 mm (W) 3-5/32 x (D) 7-1/4 x (H) 1-31/32 (inches)

COAXIAL-LAN CONVERTER



MODEL#	WJ-PC200	WJ-PR204	WJ-PR201
Device Type	Camera Side Unit	4CH Receiver	1CH Receiver
Max. Distance w/ AC adaptor	PoE cam non - PoE cam	— 500 m (1,640 ft.)	500 m (1,640 ft.) 2.0 km (6,561 ft.)
Optional Rack Mount	—	BY-HCA10A	

SYSTEM CONTROLLER



MODEL#	WV-CU980
Specifications	Integrated control for Camera, Recorder and GUI: - 3D Joystick for Pan/Tilt/Zoom control - Work with WV-ASM300, Video Insight VIM+ version 7.6 or later * WV-ASM200, WV-ASC970 is not supported


i-PRO Active Guard

Immediate response to or prevention of incidents

- Detect various events such as intruder, on-site learning object, scene change, occupancy, gunshot sound, and watchlist alarm for specific faces, people, vehicle and license plate group, Container code and OCR code.
Rule-based action on VMS enables automation of system behavior when an event occurs.


- A mobile application* frees you from work in a monitoring room. Also, by linking the PC software and mobile application, the necessary information can be transmitted from a person in the monitoring room to the security guards outside.

*Video Insight only.

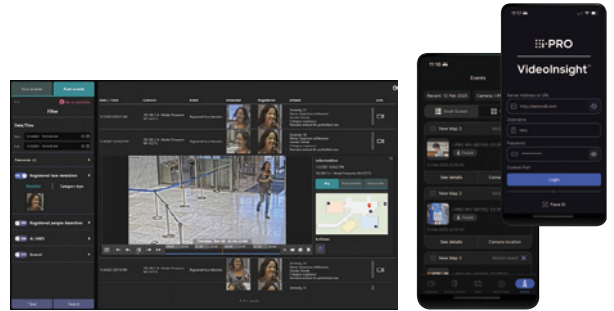


Significant reduction in post investigation time

- Searching by face, license plate, and characteristics of people and vehicles and region of interest enables fast searching in a matter of seconds, not hours.
- This advantage is maximized by many supported attributes with high precision based on i-PRO deep learning technology and by the high image quality of the i-PRO camera.

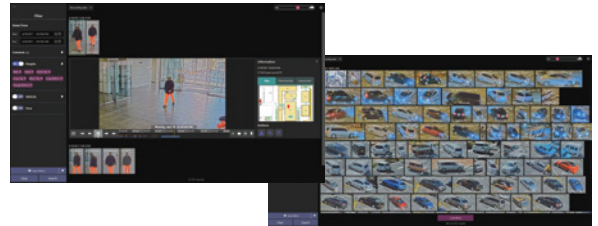


Customizable dashboard display for business intelligence

- The dashboard on the web browser shows people counting, license plate counting, face and gender statistics, and people and vehicle attribute statistics. This can be utilized for business intelligence.
- Users can customize the content, size, location, data display period, etc. shown according to their needs.

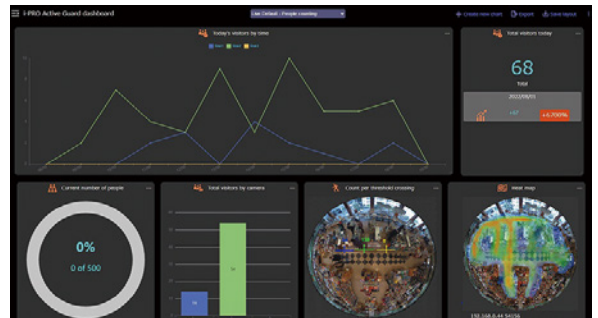

Flexible system architecture

- Fully integrated into devices from Genetec, Milestone, and Luxriot, as well as Video Insight.
- No need for expensive analysis server thanks to edge analytics.
- By installing and using the required AI Edge Applications for each camera, you can use the performance of AI without waste.

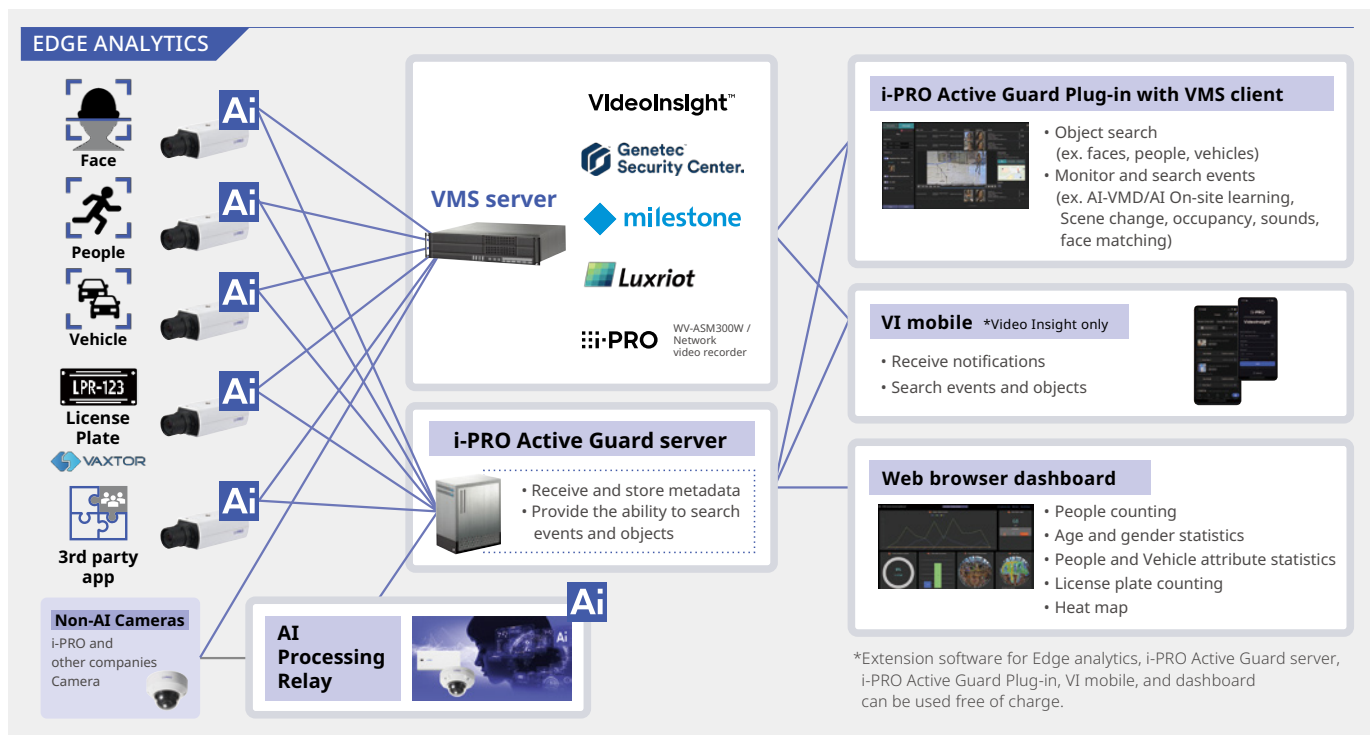

GO BEYOND TRADITIONAL ANALYTICS WITH INTELLIGENT SOLUTIONS FROM i-PRO

In today's environment, more users are looking to actively manage large surveillance systems. As these systems become more complex, i-PRO's intelligent analytics can help users by reducing the learning curve and system resources required to operate them. From improving the accuracy of alarms and notifications to reducing the overall system bandwidth and storage requirements, i-PRO Intelligent analytics has you covered.

- Change your surveillance system from reactive to proactive and anticipate situations before they occur.
- i-PRO surveillance users can gain added sight awareness with intelligent analytics via scene analysis.
- Optimized feature solutions for schools, municipalities, and commercial facilities.
- i-PRO analytics may be deployed either at the edge or server level providing a flexible deployment.

ANALYTICS AT THE EDGE




AI-VMD / AI Counting (crossline)

AI-VMD can identify between objects. The cameras actively read the scene and uniquely differentiate between people, vehicles and two-wheeled vehicles. Additionally, AI-VMD offers users intelligent functionality such as line-cross detection/counting, loitering detection and directional detection.



AI On-site Learning

AI On-site Learning allows to enhance AI-VMD by adding target object and improving accuracy. You can add customized objects to detect using on-site camera footage through simple learning process. In addition, it contributes to reduce missed/false alarms by training based on the past footage.



AI People/Vehicle/Face Detection

These analytics allow you to detect people, vehicles, faces, and send the metadata and best images to the server. They are compatible with i-PRO Active Guard, a search function that quickly finds people or vehicles through the video management software, Video Insight, Genetec, Milestone, Luxriot etc.




AI Scene Change Detection

Scene Change Detection is the first AI-based analytic application that provides easy on-site learning of a scene. When anomalies occur within the camera's field of view, an alert can be sent to security and operations teams. It's particularly good at an object left behind or illegal parking scenarios.




AI Sound Classification

AI Sound Classification allows you to detect suspicious sounds, such as gunshots, screaming, vehicle horns or glass breaking.



AI Privacy Guard

When deployed on i-PRO AI engine cameras, AI Privacy Guard protects the privacy of individuals within the scene by applying a mosaic over their face in real time.



AI Occupancy Detection / AI Counting (area)

When deployed on an i-PRO AI engine camera, AI Occupancy Detection will be able to detect the crowd congestion and send the pop-up alarm notification. Information of the number of people in the area can be output externally via HTTP or MQTT.



AI Processing Relay

AI processing relay enables to turn "non-AI camera" into "AI camera" without any re-installation costs. It receives MJPEG data from non-AI cameras, performs AI processing with AI extension software, and performs alarm reception and image search with i-PRO Active Guard.




System Design Tool

The System Design Tool is a great tool that can be used on the web anytime, anywhere, greatly reducing the work required for system design.


Features and Benefits

- **Interactive:**
When the camera setting conditions are changed, the perception and size of the subject can be immediately simulated.
- **Optimization:**
The ideal camera placement and number can be calculated while confirming the overlap in the recording range between cameras.
- **Accessible:**
Data saved as a project can be accessed from the web at any time.
- **Utilization:**
You can export the design results as a report or CSV and use it as proposal data.

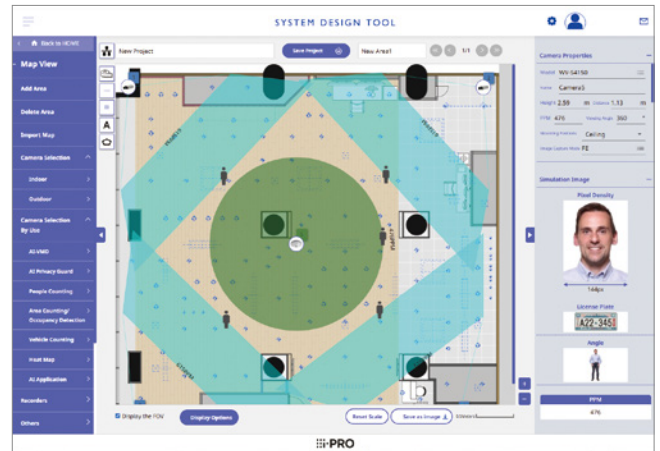


Recorder Calculation

It is possible to estimate the number of recorders and necessary options that can be used according to the number of cameras, network bandwidth, and number of recording days.

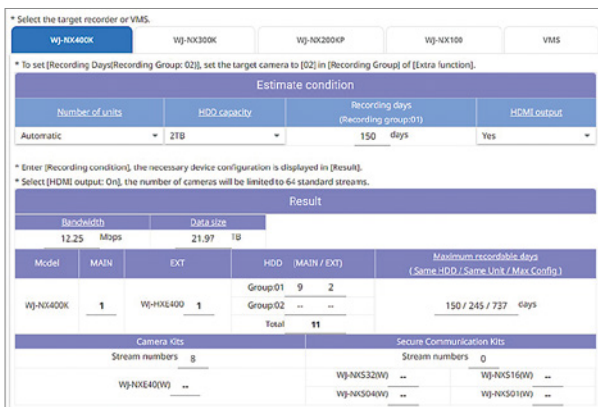

System design calculators

Recorder settings and i-PRO Active Guard software settings simulation can be easily performed using web calculation tools. Advanced knowledge and skills are not required.

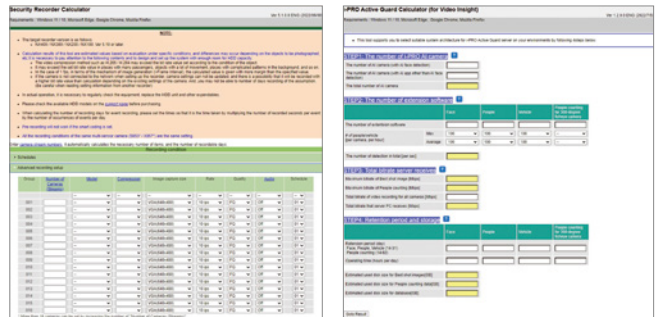

i-PRO Configuration Tool (iCT)


i-PRO Configuration Tool is designed to efficiently configure the settings and maintenance of up to 1,024 i-PRO devices (network cameras, disk recorders, etc.) through a personal computer via a network.

Features and Benefits

- Camera batch settings for up to 1,024 multiple cameras
- Camera advanced settings with image stream viewing screen
- AI extension software batch installation and advanced settings
- Generation of devices settings report with camera view images
- Collective maintenance of devices, including automatic firmware updates

Related products of i-PRO Configuration Tool

- i-PRO Settings Plug-in for Genetec / for Milestone XProtect
- i-PRO Configuration Tool for Tablet (Android/iOS)

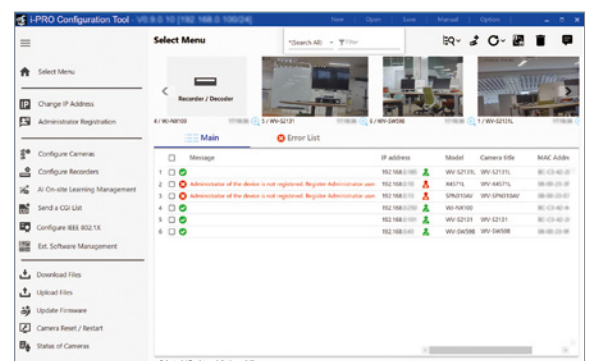

Network Camera Model Number Format

Network Camera Model Number Format - 1

W	V	-	S	2	5	3	6	L	T	A
		Series		Form	Environment	Resolution	Serial	Other Features & Minor changes		
		X : eXtraordinary		9 :-	9 :-	9 :-	0 - 9	A-D : Minor Change		
		S : Standard		8 : Multi-Sensor	8 :-	8 :-		L : LED		
		U : Utility		7 :-	7 :-	7 : 4K		N : ClearSight		
				6 : PTZ (Dome)	6 :-	6 :		M : M12		
				5 :-	5 : Outdoor Vandal	5 : 5MP		T : Long focal lens		
				4 : 360 deg.	4 :-	4 : 4MP		S : Salt resistant		
				3 : Compact Dome	3 :-	3 : 2MP				
				2 : Dome	2 : Indoor Vandal	2 :				
				1 : Box	1 : Indoor Normal	1 : 1MP				
				0 :-	0 :-	0 :-				

Network Camera Model Number Format - 2

W		V	-	S	2	5	7	0	0	-	V	2	L	N					
Series		Form		Environment		Resolution		Serial		Version		Lens1		Lens2		Feature		Color	
X : eXtraordinary		8 : Multi-Sensor		7 : Outdoor Vandal		7 : 4K		00 - 99		None		F : Fixed lens		None : No lens		L : IR-LED		None : White	
S : Standard		7 : Mini		+ Salt resistance		6 : 6MP				A, B, C		V : Vari-focal		Y, 1 to 9 :		M : M12 connector		1, -1 : Black	
U : Utility		6 : PTZ		6 : Outdoor Vandal		5 : 5MP						T : Long focal		See below		G : Smoke dome		2, -2 : Silver	
		4 : 360-deg		5 : Outdoor Vandal		4 : 4MP						Z : Zoom lens				N : ClearSight		3, -3 : Gray	
		3 : Compact Dome		4 : Outdoor Normal		3 : 2MP						U : No Lens				S : Salt resistant		4, -4 : Brown	
		2 : Dome		2 : Indoor Vandal		1 : 1MP										K : ClearSight & Salt resistant			
		1 : Box		1 : Indoor Normal															

Lens2								
	Y	1	2	3	4	5	6	
Lens1	F	-	1 - 1.9 mm	2 - 2.9 mm	3 - 3.9 mm	4 - 4.9 mm	5 - 5.9 mm	6 - 6.9 mm
	V, T	-	1 - 1.9x	2 - 2.9x	3 - 3.9x	4 - 4.9x	5 - 5.9x	6 - 6.9x
	Z	< 10x	10 - 19.9x	20 - 29.9x	30 - 39.9x	40 - 49.9x	50 - 59.9x	60 - 69.9x

Accessory Model number structure

W	V	-	Q	S	R	5	0	3	F	-	W
		Product Type		Serial				Option	Version	Color	
		EM : Embedded		AT : Attachment				M : Male screw (ISO)	None, A, B	G : Gray	
		CL : Ceiling		CA : Cable				M1 : Male screw (ANSI)		S : Silver	
		WL : Wall		LR : Light Rail				F : Female screw (ISO)		B : Black	
		PL : Pole		CD : Ceiling Dome				F1 : Female screw (ANSI)		W : i-PRO white, White	
		CN : Corner		WD : Wall+Dome cover				C : Clear Dome			
		SR : Shroud		ED : Embedded+Dome cover				G : Smoke Dome			
		JB : Junction Box, Base cover		DC : Dome cover				S : Salt resistant			
								N : ClearSight			

MULTI-DIRECTIONAL + PTZ CAMERAS



OUTDOOR

WV-X86531-Z2	White
WV-X86531-Z2-1	Black
WV-X86530-Z2	White
WV-X86530-Z2-1	Black

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QDC502G Smoke Dome	✓
	WV-QDC502C Clear Dome	✓
	WV-QCA501A Multi Cable (Ext I/O, Audio, DC)	✓
	WJ-PU201/G PoE++ injector	✓
	WJ-PU201F/G PoE++ injector	✓

WALL/ POLE/ CORNER	 WV-QSR508-W* WV-QSR508-B (4-screw) WV-QWL501-W WV-QWL501-B	FOR POLE WV-QPL500-W WV-QPL500-B FOR CORNER WV-QCN500-W WV-QCN500-B
HANGING	 WV-QSR508-W* WV-QSR508-B (4-screw) WV-QCL501-W WV-QCL501-B	
CEILING	 WV-Q105A (Indoor only. If needed.)	
RECESSED	 WV-QEM506-W WV-QEM506-B (Indoor only)	

*Other mounts to install with locally procured pipes/brackets are also available:
WV-QSR508F-W/WV-QSR508F-B (ISO Female), WV-QSR508M-W/WV-QSR508M-B (ISO Male),
WV-QSR508F1-W/WV-QSR508F1-B (ANSI Female), WV-QSR508M1-W/WV-QSR508M1-B (ISO Male)

MULTI-SENSOR CAMERAS



OUTDOOR

WV-S8574L, LG	White
WV-S8573L, LG	White
WV-S8564L, LG	White
WV-S8563L, LG	White
WV-S8544L, LG	White
WV-S8543L, LG	White
WV-S8544, G	White
WV-S8543, G	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QDC501G Smoke Dome	✓
	WV-QDC501C Clear Dome	✓
	WV-QCA501A Multi Cable (Ext I/O, Audio, DC)	✓

WALL/ POLE/ CORNER	 WV-QSR503-W* (4-screw) WV-QWL501-W	FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
HANGING	 WV-QSR503-W* (4-screw) WV-QCL501-W	
CEILING	 WV-QJB503-W (If needed)	
	 WV-QJB503-W	WV-Q105A (Indoor only. If needed.)

*Other mounts to install with locally procured pipes/brackets are also available:
WV-QSR503F-W (ISO Female), WV-QSR503M-W (ISO Male),
WV-QSR503F1-W (ANSI Female), WV-QSR503M1-W (ISO Male)

DUAL-SENSOR CAMERAS



OUTDOOR

WV-S85702-F3L	White
WV-S85702-F3L1	Black
WV-S85402-V2L	White
WV-S85402-V2L1	Black
WV-U85402-V2L	White
WV-U85402-V2L1	Black

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-CW7S Smoke Dome	✓
	WV-QDC504C Clear Dome	✓
	WV-CW7SN Smoke Dome with ClearSight Coating	✓
	WV-CW7CN Clear Dome with ClearSight Coating	✓
	WV-QCA501A Multi Cable (Ext I/O, Audio, DC)	✓

WALL/ POLE/ CORNER		WV-QWL501-W WV-QWL501-B	FOR POLE WV-QPL500-W WV-QPL500-B FOR CORNER WV-QCN500-W WV-QCN500-B
			Sunshade (Standard accessory.)
HANGING		WV-QCL501-W WV-QCL501-B	
CEILING			WV-Q105A (Indoor only. If needed.)

*Other mounts to install with locally procured pipes/brackets are also available:

WV-QSR507F-W/WV-QSR507F-B (ISO Female), WV-QSR507M-W/WV-QSR507M-B (ISO Male),
WV-QSR507F1-W/WV-QSR507F1-B (ANSI Female), WV-QSR507M1-W/WV-QSR507M1-B (ISO Male)

OUTDOOR PTZ CAMERAS



SALT RESISTANT

WV-X67711-Z3L3	Gray
WV-X67710-Z3-3, Z3L3	Gray
WV-X67710-Z3-1, Z3L1	Black
WV-X67701-Z3L3	Gray
WV-X67700-Z3-3, Z3L3	Gray
WV-X67311-Z4L3	Gray
WV-X67310-Z4-3, Z4L3	Gray
WV-X67310-Z4-1, Z4L1	Black
WV-X67301-Z4L3	Gray
WV-X67300-Z4-3, Z4L3	Gray

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QCA502 Multi cable (Ext I/O, Audio, Relay)	✓

WALL/ POLE/ CORNER (Salt resistant)		WV-QWL503S-G WV-QWL503S-B (Salt resistant)	FOR POLE Mount QWL503S directly FOR CORNER WV-QCN500S-G (Salt resistant)
WALL/ POLE/ CORNER (Non-Salt resistant)		WV-QWL503-G WV-QWL503-B	FOR POLE WV-QWL503 Mount directly FOR CORNER WV-QCN500-W WV-QCN500-B

OUTDOOR PTZ CAMERAS



OUTDOOR

WV-S66700-Z3, Z3L	White
WV-S66700-Z3N, Z3LN	White
WV-S66600-Z3, Z3L	White
WV-S66600-Z3N, Z3LN	White
WV-S66300-Z4, Z4L	White
WV-S66300-Z4N, Z4LN	White
WV-S66300-Z3, Z3L	White
WV-S66300-Z3N, Z3LN	White

SALT RESISTANT

WV-X66700-Z3S, Z3LS	White
WV-X66700-Z3K, Z3LK	White
WV-X66600-Z3S, Z3LS	White
WV-X66600-Z3K, Z3LK	White
WV-X66300-Z4S, Z4LS	White
WV-X66300-Z4K, Z4LK	White
WV-X66300-Z3S, Z3LS	White
WV-X66300-Z3K, Z3LK	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QDC508G Smoke Dome	✓
	WV-QDC508CN Clear Dome with ClearSight Coating	✓
	WV-QDC508C Clear Dome	✓
	WV-QCA501A Multi Cable (Ext I/O, Audio, DC)	✓
	WJ-PU201/G PoE++ injector	✓
	WJ-PU201F/G PoE++ injector	✓

WALL/ POLE/ CORNER		WV-QWL502-W	FOR POLE Mount QWL502 directly	FOR CORNER WV-QCN500-W
		WV-QSR506-W* (4-screw) WV-QWL501-W	FOR POLE WV-QPL500-W	FOR CORNER WV-QCN500-W
HANGING		WV-QSR506-W* (4-screw) WV-QCL501-W		
CEILING		WV-QJB505-W	WV-Q105A (Indoor only. If needed.)	
RECESSED		WV-QEM505-W (Indoor only)		
WALL/ POLE/ CORNER		WV-QSR506S-W (4-screw) (Salt resistant) WV-QWL501S-W (Salt resistant)	FOR POLE WV-QPL500S-W (Salt resistant)	FOR CORNER WV-QCN500S-W (Salt resistant)
		WV-QSR506S-W (4-screw) (Salt resistant) WV-QCL501S-W (Salt resistant)		

*Other mounts to install with locally procured pipes/brackets are also available:

WV-QSR506F-W (ISO Female), WV-QSR506M-W (ISO Male),
WV-QSR506F1-W (ANSI Female), WV-QSR506M1-W (ISO Male)

OUTDOOR PTZ CAMERAS



OUTDOOR

WV-X6533LN, WV-S6532LN

Silver

SALT RESISTANT

WV-X6533LNS, WV-S6532LNS

Silver

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WJ-PU201/G PoE++ injector	✓
	WJ-PU201F/G PoE++ injector	✓

WALL/ POLE/ CORNER		WV-Q122A Silver	FOR POLE WV-Q188 Silver	FOR CORNER WV-Q189 Silver
		WV-QWL504-B	FOR POLE Mount QWL504 directly	FOR CORNER WV-Q189 Silver
HANGING		WV-Q121B Silver		
CEILING		WV-QCL500-S Silver		
WALL/ POLE/ CORNER		WV-Q122AS Silver (Salt resistant)	FOR POLE WV-QPL500S-W (Salt resistant)	FOR CORNER WV-QCN500S-W (Salt resistant)

OUTDOOR PTZ CAMERAS



OUTDOOR

WV-S65340-Z4, Z4N, Z4G
WV-S65340-Z4N1

White
Black

WV-S65340-Z2, Z2N, Z2G
WV-S65340-Z2N1

White
Black

SALT RESISTANT

WV-S65340-Z4K

White

WV-S65340-Z2K

White

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QDC503G Smoke Dome	✓
	WV-QDC503C Clear Dome	✓
	WV-QDC503CN Clear Dome with ClearSight coating	✓
	WJ-PU201/G PoE++ injector	✓
	WJ-PU201F/G PoE++ injector	✓

WALL/ POLE/ CORNER		WV-QSR504-W* WV-QSR504-B (4-screw)	WV-QWL501-W WV-QWL501-B	FOR POLE WV-QPL500-W WV-QPL500-B	FOR CORNER WV-QCN500-W WV-QCN500-B
		WV-QWL504-W WV-QWL504-B		FOR POLE Mount QWL504 directly	FOR CORNER WV-QCN500-W WV-QCN500-B
HANGING		WV-QSR504-W* WV-QSR504-B (4-screw)	WV-QCL501-W WV-QCL501-B		
CEILING			WV-QCL500-W		
WALL/ POLE/ CORNER		WV-QSR504S-W (4-screw) (Salt resistant)	WV-QWL501S-W (Salt resistant)	FOR POLE WV-QPL500S-W (Salt resistant)	FOR CORNER WV-QCN500S-W (Salt resistant)
		WV-QWL504S-W (Salt resistant)		FOR POLE Mount QWL504 directly	FOR CORNER WV-QCN500S-W (Salt resistant)
HANGING		WV-QSR504S-W (4-screw) (Salt resistant)	WV-QCL501S-W (Salt resistant)		

*Other mounts to install with locally procured pipes/brackets are also available:
WV-QSR504F-W/WV-QSR504F-B (ISO Female), WV-QSR504M-W/WV-QSR504M-B (ISO Male),
WV-QSR504F1-W/WV-QSR504F1-B (ANSI Female), WV-QSR504M1-W/WV-QSR504M1-B (ISO Male)

OUTDOOR PTZ CAMERAS



OUTDOOR

WV-S65501-Z1, Z1G	White
WV-S65302-Z2, Z2G	White
WV-S65302-Z2-1	Black
WV-S65301-Z1, Z1G	White
WV-S65301-Z1-1	Black
WV-S65300-ZY, ZYG	White
WV-U65302-Z2, Z2G	White
WV-U65301-Z1, Z1G	White
WV-U65300-ZY, ZYG	White

SALT RESISTANT

WV-S65301-Z1S	White
---------------	-------

ACCESSORIES

PICTURE	SKU DESCRIPTION	S65302, S65501, S65301 U65302, U65301	S65300 U65300
	WV-QDC502G Smoke Dome	✓	
	WV-QDC502C Clear Dome	✓	
	WV-CW7S Smoke Dome		✓
	WV-QDC504C Clear Dome		✓
	WV-CW7SN Smoke Dome with ClearSight Coating		✓
	WV-CW7CN Clear Dome with ClearSight Coating		✓
	WV-QCA500A RJ45 Ethernet cable	✓*	✓
	WV-QCA501A Multi cable (Ext I/O, Audio, DC)	✓	✓

* Included in camera

WALL/ POLE/ CORNER		WV-QWL500-W WV-QWL500-B	WV-QJB500-W WV-QJB500-B (If needed)	FOR POLE WV-QPL500-W WV-QPL500-B	FOR CORNER WV-QCN500-W WV-QCN500-B
		WV-QSR501-W* WV-QSR501-B (4-screw)	WV-QWL501-W WV-QWL501-B	FOR POLE WV-QPL500-W WV-QPL500-B	FOR CORNER WV-QCN500-W WV-QCN500-B
HANGING		WV-QSR501-W* WV-QSR501-B (4-screw)	WV-QCL501-W WV-QCL501-B		
CEILING		WV-QJB504-W WV-QJB501-W WV-QJB501-B (If needed)		WV-Q105A (Indoor only. If needed.)	
RECESSED			WV-QEM504-W (for S65302/U65302) WV-QEM503-W (for S65501/S65301/U65301) WV-QEM502-W (for S65300/U65300) (Indoor only)		
WALL/ POLE/ CORNER		WV-QSR501S-W (4-screw) (Salt resistant)	WV-QWL501S-W (Salt resistant)	FOR POLE WV-QPL500S-W (Salt resistant)	FOR CORNER WV-QCN500S-W (Salt resistant)
		WV-QSR501S-W (4-screw) (Salt resistant)	WV-QCL501S-W (Salt resistant)		

*Other mounts to install with locally procured pipes/brackets are also available:

WV-QSR501F-W/WV-QSR501F-B (ISO Female), WV-QSR501M-W/WV-QSR501M-B (ISO Male),
WV-QSR501F1-W/WV-QSR501F1-B (ANSI Female), WV-QSR501M1-W/WV-QSR501M1-B (ISO Male)

Note

INDOOR PTZ CAMERAS



INDOOR

WV-S61702-Z3	White
WV-S61602-Z3	White
WV-S61302-Z4	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QDC100G-W Smoke Dome	✓
	WV-QDC100C-W Clear Dome	✓

WALL/ POLE/ CORNER	 WV-QWL100-W FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
HANGING	 WV-QCL100-W WV-QCL101-W locally procured pipe WV-QCL100-W, WV-QCL101-W (Indoor only. If needed.)
CEILING	 WV-Q105A (Indoor only. If needed.)
RECESSED	 WV-QEM101-W

INDOOR PTZ CAMERAS



INDOOR

WV-S61501-Z1	White
WV-S61301-Z2	White
WV-U61301-Z2	White
WV-S61301-Z1	White
WV-S61300-ZY, ZYG	White
WV-U61301-Z1	White
WV-U61300-ZY, ZYG	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	S61501 S61301 U61301	S61300 U61300
	WV-QDC102C Clear Dome	✓	
	WV-CF55A Smoke Dome		✓
	WV-QDC101C Clear Dome		✓
	WV-QAT100 Inner Cover	✓	

WALL/ POLE/ CORNER	 WV-QWL500-W WV-QJB500-W (If needed) FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
HANGING	 WV-QCL100-W WV-QCL101-W locally procured pipe WV-QCL100-W, WV-QCL101-W (Indoor only. If needed.)
CEILING	 WV-Q105A (Indoor only. If needed.)
RECESSED	 S61501/S61301/U61301 only: WV-QED100C-W Clear Dome WV-QED100G-W Smoke Dome S61300/U61300 only: WV-QEM501-W

CORNER CAMERA



OUTDOOR

WV-X25580-F2LN2

Silver

CORNER



WV-QJB506-B
(If needed)

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QDC509CN Clear Dome with ClearSight Coating	✓
	WV-QCA500A RJ45 Ethernet cable	✓
	WV-QCA501A Multi cable (Ext I/O, Audio, DC)	✓

OUTDOOR DOME CAMERAS



OUTDOOR

WV-X25700-V2LN, WV-X25600-V2LN
WV-X25500-V3LN, WV-X25300-V3LN

White

WV-S25700-V2L, V2LN, V2LG
WV-S25700-V2LN1

White
Black

WV-S25600-V2L, V2LN, V2LG

White

WV-S25500-V3L, V3LN, V3LG, F6L, F3L
WV-S25500-V3LN1

White
Black

WV-S2536LA, LNA, LGA, LGNA
WV-S2536LTA, LTNA

White

WV-U25751-V3L, WV-U25551-V3L
WV-U25351-V3L

White

WV-U2542LA, WV-U2532LA

White

ACCESSORIES

PICTURE	SKU DESCRIPTION	OTHERS	U2542, U2532
	WV-CW7S Smoke Dome	✓	✓
	WV-QDC504C Clear Dome	✓	✓
	WV-CW7SN Smoke Dome with ClearSight Coating	✓	✓
	WV-CW7CN Clear Dome with ClearSight Coating	✓	✓
	WV-QCA500A RJ45 Ethernet cable	✓	
	WV-QCA501A Multi cable (Ext I/O, Audio, DC)	✓	

**WALL/
POLE/
CORNER**



WV-QWL500-W
WV-QWL500-B

WV-QJB500-W
WV-QJB500-B
(If needed)

FOR POLE
WV-QPL500-W
WV-QPL500-B

FOR CORNER
WV-QCN500-W
WV-QCN500-B



WV-QSR501-W*
WV-QSR501-B
(4-screw)

WV-QWL501-W
WV-QWL501-B

FOR POLE
WV-QPL500-W
WV-QPL500-B

FOR CORNER
WV-QCN500-W
WV-QCN500-B



WV-QSR505-W
WV-QSR505-B
(If needed)

WV-QJB501-W
WV-QJB501-B
(If needed)

FOR POLE
WV-QPL500-W
WV-QPL500-B

FOR CORNER
WV-QCN500-W
WV-QCN500-B

HANGING



WV-QSR501-W*
WV-QSR501-B
(4-screw)

WV-QCL501-W
WV-QCL501-B

CEILING



WV-QJB504-W
WV-QJB501-W
WV-QJB501-B
(If needed)

WV-Q105A
(Indoor only. If needed.)

RECESSED



WV-QEM500-W
(Indoor only)

*Other mounts to install with locally procured pipes/brackets are also available:
WV-QSR501F-W/WV-QSR501F-B (ISO Female), WV-QSR501M-W/WV-QSR501M-B (ISO Male),
WV-QSR501F1-W/WV-QSR501F1-B (ANSI Female), WV-QSR501M1-W/WV-QSR501M1-B (ISO Male)

INDOOR DOME CAMERAS



INDOOR

WV-X22700-V2L, WV-X22600-V2L WV-X22500-V3L, WV-X22300-V3L	White
WV-S22700-V2L, V2LG WV-S22700-V2L1	White Black
WV-S22600-V2L, V2LG	White
WV-S22500-V3L, V3LG, F6L, F3L WV-S22500-V3L1	White Black
WV-S2236LA, LGA WV-S2236LA-B, LGA-B	White Black
WV-S2136LA, LGA WV-S2136LA-B, LGA-B	White Black
WV-S2136A, WV-S2136GA WV-S2136A-B, WV-S2136GA-B	White Black
WV-U21550-V3L, WV-U21350-V3L	White
WV-U2142LA, WV-U2132LA, WV-U21300-V2L	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	OTHERS	S2136, U21550, U21350, U2142, U2132, U21300
	WV-CR1S Smoke Dome	✓	
	WV-QDC200C Clear Dome	✓	
	WV-CF55A Smoke Dome		✓
	WV-QDC101C Clear Dome		✓

WALL/ POLE/ CORNER		WV-QJB500-W WV-QJB500-B (If needed)	FOR POLE WV-QPL500-W WV-QPL500-B	FOR CORNER WV-QCN500-W WV-QCN500-B
			S21/U21 series only WV-QSR100-W WV-QSR100-B (If needed)	
HANGING		WV-QCL100-W WV-QCL101-W WV-QCL100-B WV-QCL101-B	locally procured pipe	WV-QCL100-W, WV-QCL101-W WV-QCL100-B, WV-QCL101-B (Indoor only. If needed.)
CEILING				WV-Q105A (If needed)
RECESSED				WV-QEM100-W WV-QEM100-B

Note

COMPACT DOME CAMERAS



OUTDOOR

WV-U25550-F3L, WV-U25350-F3L White

WV-U2540LA, U2530LA	White
---------------------	-------

INDOOR

WV-U22750-F3L, WV-U22550-F3L, WV-U22350-F3L	White
--	-------

WV-U2140LA, WV-U2130LA White

ACCESSORIES

PICTURE	SKU DESCRIPTION	OTHERS	U25550, U25350, U22750, U22550, U22350
	WV-QDC500S Smoke Dome		
	WV-QDC500C Clear Dome		
	WV-QDC510G Smoke Dome		
	WV-QDC510C Clear Dome		
	WV-QCA504 Audio Cable		

WALL/ POLE/ CORNER	     WV-QWL500-W WV-QJB500-W (If needed) FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
	  WV-QJB502A-W
HANGING	    WV-QCL100-W WV-QCL101-W (Indoor only) locally procured pipe WV-QCL100-W WV-QCL101-W (Indoor only. If needed.)
CEILING	  WV-QJB502A-W
DOUBLE/ OCTAGON GANG BOX	  WV-QAT502-W

Note

HIGH ZOOM BULLET CAMERA



OUTDOOR

WV-X15701-Z3L, Z3LN	White
WV-X15502-Z1L, Z1LN	White
WV-X15501-Z3L, Z3LN	White
WV-X15501-Z1L, Z1LN	White
WV-X15302-Z1L, Z1LN	White
WV-X15301-Z1L, Z1LN	White
WV-S15701-Z3L, Z3LN	White
WV-S15501-Z3L, Z3LN	White
WV-S15501-Z1L, Z1LN	White
WV-S15301-Z1L, Z1LN	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
	WV-QCA500A RJ45 Ethernet cable	✓ * Included in camera
	WV-QCA501A Multi cable (Ext I/O, Audio, DC)	✓
	WJ-PU201 PoE++ injector	✓

WALL/ POLE/ CORNER		Standard accessory	 FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
CEILING		Standard accessory	 WV-Q105A (Indoor only. If needed.)

OUTDOOR BULLET CAMERAS



OUTDOOR

WV-X15700-V2L, V2LN	White
WV-X15600-V2L, V2LN	
WV-X15500-V3L, V3LN	
WV-X15300-V3L, V3LN	
WV-S15700-V2L, V2LN	White
WV-S15600-V2L, V2LN	White
WV-S15500-V3L, V3LN, F6L, F3L	White
WV-S15500-V3LN1	Black
WV-S1536LA, LNA, LTA, LTNA	White
WV-S1536LA-B, LNA-B	Black
WV-U15750-V3L, WV-U15550-V3L	White
WV-U15350-V3L	
WV-U1542LA, WV-U1532LA	White

SALT RESISTANT

WV-S15700-V2LK	White
WV-S15500-V3LK	White
WV-S1536LNSA	White

ACCESSORIES

PICTURE	SKU DESCRIPTION	OTHERS	U15750, U15550, U15350, U1542, U1532
	WV-QCA500A RJ45 Ethernet cable	✓	
	WV-QCA501A Multi cable (Ext I/O, Audio, DC)	✓	

WALL/ POLE/ CORNER		S-series: Standard accessory U-series: WV-QJB500-W WV-QJB500-B (If needed)	 FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
HANGING		S-series: Standard accessory U-series: WV-QJB500-W WV-QJB500-B (If needed)	 WV-QCL100-W WV-QCL101-W WV-QCL100-B WV-QCL101-B (Indoor only) locally procured pipe WV-QCL100-W WV-QCL101-W WV-QCL100-B WV-QCL101-B (Indoor only. If needed.)
CEILING		S-series: Standard accessory U-series: WV-QJB500-W WV-QJB500-B (If needed)	 WV-Q105A (Indoor only. If needed.)
WALL/ POLE/ CORNER			 FOR POLE WV-QPL500S-W (Salt resistant) FOR CORNER WV-QCN500S-W (Salt resistant)

INDOOR BOX CAMERAS

INDOOR

WV-S1136A	White
WV-U11550-V3, WV-U11350-V3	White
WV-U1142A, U11300-V2, U1132A	White
WV-U1130A	White



WALL/ HANGING	WV-QCL102-W
LIGHT RAIL	WV-QLR100-W

OUTDOOR FISHEYE CAMERAS

OUTDOOR

WV-S4576LA, LMA	White
WV-S4556LA, LMA	White



ACCESSORIES

PICTURE	SKU DESCRIPTION	ALL
---------	-------------------	-----

	WV-QDC507C Clear Dome	✓
--	--------------------------	---

WALL/ POLE/ CORNER	WV-QWL500-W WV-QJB500-W (If needed) FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
HANGING	WV-QSR501-W* (4-screw) WV-QWL501-W FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
CEILING	S4576LMA, S4556LMA only: WV-QJB504-W S4576L/S4556L: Standard accessory S4576LM/S4556LM: WV-QJB501-W (If needed) WV-Q105A (Indoor only. If needed.)

*Other mounts to install with locally procured pipes/brackets are also available:
WV-QSR501F-W (ISO Female), WV-QSR501M-W (ISO Male),
WV-QSR501F1-W (ANSI Female), WV-QSR501M1-W (ISO Male)

INDOOR FISHEYE CAMERAS

INDOOR

WV-S4176A	White
WV-S4156A	White



WALL/ POLE/ CORNER	WV-QWL500-W WV-QJB500-W (If needed) FOR POLE WV-QPL500-W FOR CORNER WV-QCN500-W
HANGING	WV-QCL100-W WV-QCL101-W locally procured pipe WV-QCL100-W, WV-QCL101-W (Indoor only. If needed.)
CEILING	WV-QCL102-W FOR CEILING WV-QCL102-W FOR LIGHT RAIL WV-QLR100-W

WV-X35402-F2L, F2LM WV-X35302-F2L, F2LM	White
WV-S35402-F2L, F2LG WV-S35302-F2L, F2LG	White
WV-S35402-F2L1 WV-S35302-F2L1	Black
WV-U35401-F2L, F2LG WV-U35301-F2L, F2LG	White

WV-S32402-F2L, F2LG WV-S32302-F2L, F2LG	White
WV-S32402-F2L1 WV-S32302-F2L1	Black
WV-U31401-F2L, F2LG WV-U31301-F2L, F2LG	White

PICTURE	SKU DESCRIPTION	ALL
	WV-CW6SA Smoke Dome	☒
	WV-QDC505C Clear Dome	☒

WV-QWL500-W
WV-QWL500-B

WV-QJB500-W
WV-QJB500-B
(If needed)

FOR POLE
WV-QPL500-W
WV-QPL500-B

FOR CORNER
WV-QCN500-W
WV-QCN500-B

WV-QJB502A-W
WV-QJB502A-B
 (If needed, U31401/U31301 is not compatible.)

Diagram illustrating the connection of a locally procured pipe to the WV-QCL100-W, WV-QCL101-W, WV-QCL100-B, and WV-QCL101-B (Indoor only) models. The diagram shows a pipe being inserted into the top of the unit.

WV-QCL100-W
WV-QCL101-W
WV-QCL100-B
WV-QCL101-B
(Indoor only)

locally procured pipe

WV-QCL100-W, WV-QCL101-W
WV-QCL100-B, WV-QCL101-B
(Indoor only. If needed.)

 WV-QJB502A-W
 WV-QJB502A-B
 (If needed, U31401/U31301 is not compatible.)

WV-OAT502-W

WV-S71300A-F3	White
---------------	-------

Diagram illustrating the connection of the WV-OC102-W camera to the WV-OC102-W camera. A blue arrow points from the WV-OC102-W camera to the WV-OC102-W camera.

[illegible]

[illegible]

[illegible]

Trademarks and registered trademarks

- HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing, LLC.
- ONVIF is a trademark of ONVIF, Inc.
- GlobalSign and the GlobalSign Logo are registered trademarks of GMO GlobalSign K.K.
- The SD, SDHC, miniSDHC, microSDHC, SDXC and microSDXC Logos are trademarks of SD-3C LLC.
- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.
- Android is a trademark of Google LLC.
- All other trademarks identified herein are the property of their respective owners.

Important

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.
- The same catalog is provided for all countries. Some accessories may not be available in some countries.

Security Cautions

- When using the products in this catalog, take appropriate measures to avoid the following security breaches:
 - Disclosure of private information via the products.
 - Unauthorized use of products by a third party.
 - Interference or suspension of use of products by third party.
 - All pictures are simulated.
 - Design and specifications are subject to change without notice.



i-PRO Co., Ltd.

https://i-pro.com/products_and_solutions/surveillance

(2B-017LA)

MULTI-PURPOSE WHITE-LIGHT LED

rayLUX PRODUCTS

AT A GLANCE

rayTEC[®]

WHITE-LIGHT DIVISION

www.raytecctv.com

WHITE-LIGHT RANGE AT A GLANCE

DIRECTIONAL



300 SERIES



200 SERIES



150 SERIES



100 SERIES



50 SERIES



25 SERIES

URBAN



UB48 ADAPTIVE SERIES



UB32 ADAPTIVE SERIES



UBF24 FIXED SERIES



UBF16 FIXED SERIES



UBF8 FIXED SERIES

SPECIALIST



WARRIOR



LINEAR



MODULAR



PoE

WHY RAYLUX LED?



ADAPTIVE ILLUMINATION™

Adaptive Illumination™ allows the installer to adjust the angle of the light projection from a single unit to fit the specific demands of any installation. Adjustment is quick and convenient and any angle up to 180° (depending on model) is easily selectable. Adaptive Illumination is patent pending technology available exclusively from Raytec.



ACTIVE LED LIFE CONTROL

All Raytec illuminators employ cutting edge materials science techniques to improve thermal efficiency throughout the unit and ensure continuity of LED power. The New Advanced Cool Running™ system draws heat away from the LEDs, shielding the LED from abnormal stress, and allows Raytec LED products to deliver outstanding performance and consistency of illumination throughout the operational life of the illuminator.



ENERGY SAVING

All Raytec illuminators use high efficiency LED's and advanced control methods to deliver extremely low electrical consumption. Raytec illuminators are energy saving and deliver huge savings in running costs compared to traditional bulb illuminators.



SMT LED TECHNOLOGY

The future of lighting is surface mount LED technology. Compared to standard through hole LED's, surface mount LED's are a more robust solution increasing reliability and improving product life. They are also far more efficient at the dissipation of heat allowing the LED's to run at higher power and achieve significantly improved performance.




VANDAL RESISTANT


The polycarbonate lens design protects against severe blows from crowbars, baseball bats and can even withstand successive shots from air pistols and rifles (range dependant).




Source: Sodium
Consumption: 526W



Source: RAYLUX LED
Consumption: 100W

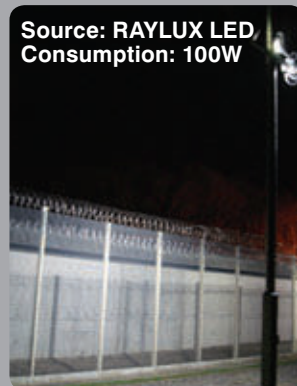

OLD TECHNOLOGY
VS NEW TECHNOLOGY



COOL RUNNING
THERMAL
MANAGEMENT

Model shown:
Directional - RAYLUX 200



DIRECTIONAL ILLUMINATION IN ACTION:



DIRECTIONAL ILLUMINATION

High Performance White-Light directional LED illuminators provide class leading performance, long life, energy efficiency and zero maintenance. They incorporate the very latest surface mount LED's to deliver excellent optical output and outstanding reliability.

The unique Adaptive Illumination™ concept provides the flexibility to direct the angle of illumination on site to suit the required lighting specification from 10 to 180 degrees.

Each unit is fitted with Active LED Life Control to carefully control LED output, delivering consistent illumination power and a projected working life of 10 years.

RAYLUX Directional illuminators are supplied with power supply. Control features on the power supply include adjustable power output, photocell and telemetry control.



ADAPTIVE
ILLUMINATION™



QUICK START
LIGHTING ON DEMAND

BEAM PATTERNS AVAILABLE:



10-20 degree

30-60 degree

50-100 degree

120-180 degree

APPLICATIONS



**Model shown:
Urban - Fixed Head UBF Series**



**Adaptive
Illumination™**
versions
available

URBAN LIGHTING RANGE

With all the benefits of the directional series, the RAYLUX Urban White-Light LED series allows installers to deliver multipurpose lighting for commercial applications such as footpaths, car parks and campus lighting as well as lighting for surveillance cameras.

The RAYLUX Urban series delivers crystal clear, energy saving White-Light, providing zero-maintenance and a pleasing aesthetic look.

The RAYLUX Urban series is a full product family and is the perfect energy saving choice for applications such as campus sites or hospital grounds where general site lighting is required to provide illumination for personnel whilst dedicated lighting for the site camera systems is required to secure the area.



ADAPTIVE ILLUMINATION™

Adaptive Illumination™ allows you to alter the horizontal light distribution on-site to suit your lighting requirement.



ADAPTIVE
ILLUMINATION™



MULTI HEAD
VERSION AVAILABLE

BEAM PATTERNS AVAILABLE:

UBF Fixed Series:

50 x 50
120 x 120
80 x 120
120 x 80


UB Adaptive Series:

50+ x 50
120+ x 120
80+ x 120
120+ x 80

APPLICATIONS



Model shown:
RAYLUX WARRIOR II

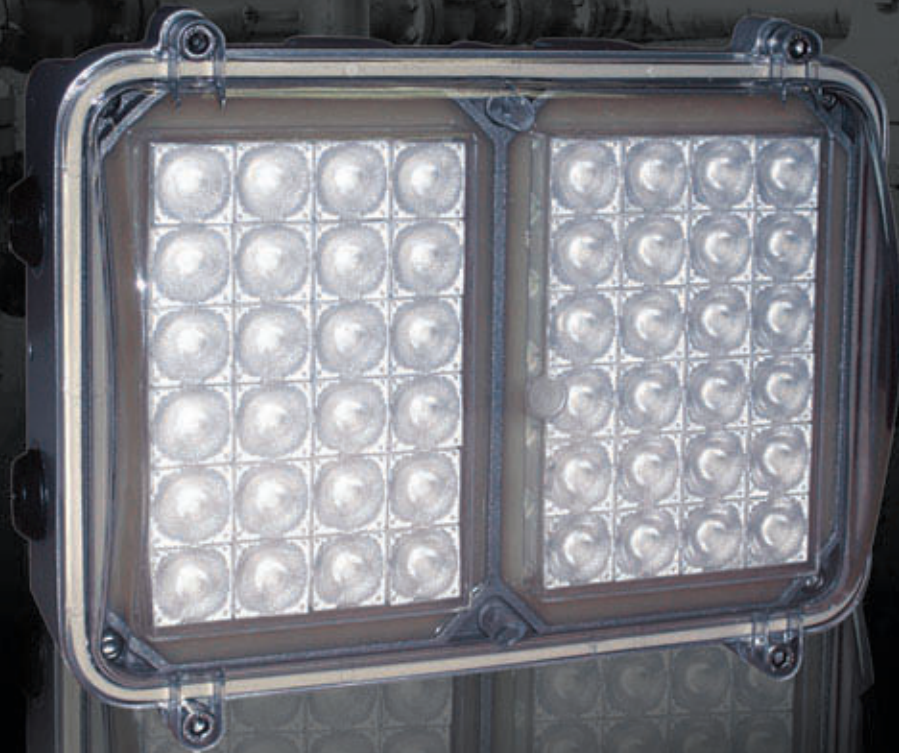

WARRIOR:

ATEX and IECEx approved for all Zone 1 and Zone 2 hazardous applications.

SPECIALIST LIGHTING

CORE TECHNOLOGY FOCUS

ELECTRONICS



THERMAL



OPTICS



SOFTWARE



With over 50,000 LED illuminators installed in 50 different countries, Raytec team of engineers and lighting designers can deliver a range of bespoke solutions and products to deliver powerful, flexible and reliable lighting for any specialist requirement.


SPECIALIST

WARRIOR




- Explosion Protected for Hazardous Areas
- ATEX & IECEx Rated
- Zone 1 and Zone 2

LINEAR



- High Power Illumination
- Linear - Perfect for Tunnels
- Flexible Design

MODULAR




- High Power Directional Illumination
- Modular - Perfect for Architecture
- Up to 31,200 lumen

PoE



- Operates from PoE
- Externally Rated
- Internal PSU/Photocell

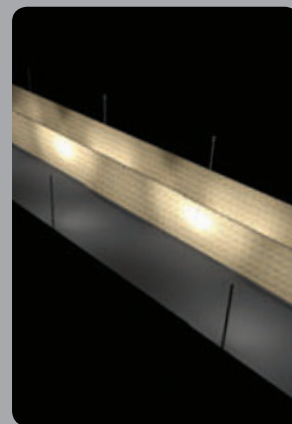

PRISON LIGHTING



ARCHITECTURAL LIGHTING

APPLICATIONS

TUNNELS



PETROL FORECOURT



MACHINE VISION



SOLAR LIGHTING



OIL & GAS



PRISONS



FREE
SPECIALIST
DESIGN SERVICE

**Model shown:
Directional - RAYLUX 200**

10, 30, 50,
120, or 80/120°
Variations

Advanced
PLATINUM
SMT LED
Technology

Vandal
Resistant

Quick start
on activation


Adaptive
Illumination™

Ultra Low
Running
Costs & Zero
Maintenance

Active LED
Life Control

Even Output
Illumination

Low Voltage
Options
Available

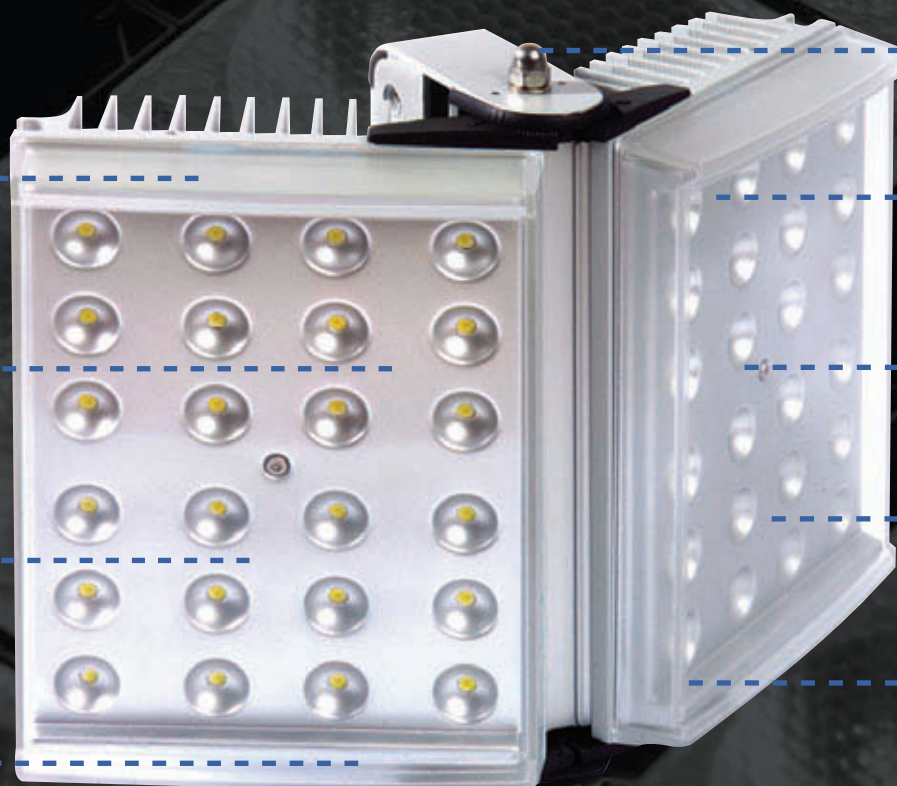

WHY ADAPTIVE ILLUMINATION™?

Adaptive Illumination™ allows the installer to adjust the angle of the light projection from a single unit to fit the specific demands of any installation. Adjustment is quick and convenient and any angle up to 180° (depending on model) is easily selectable. Adaptive Illumination is patent pending technology available exclusively from Raytec.

TECHNICAL SPECIFICATIONS

RAYLUX DIRECTIONAL SERIES

Model	Consumption	Lumen Output*	Colour Temp**	CRI**	Temp	Colour	Angles	Bracket***	IP	Weight
RL300	<120W	7000	6500K	74-80+	-50°C to +50°C	Silver other RAL options available	Various	U-Bracket	IP66	6kg
RL200	<80W	4700	6500K	74-80+						4kg
RL150	<75W	4600	6500K	74-80+						3.5kg
RL100	<50W	3100	6500K	74-80+						3kg
RL50	<25W	1600	6500K	74-80+						1.7kg
RL25	<15W	800	6500K	74-80+						1kg

RAYLUX URBAN SERIES

Model	Consumption	Lumen Output*	Colour Temp**	CRI**	Temp	Colour	Angles	Bracket***	IP	Weight
UB48	<80W	4700	6500K	74-80+	-50°C to +50°C	Silver other RAL options available	Various	Side Entry for up to 42mm	IP66	5kg
UB32	<50W	3100	6500K	74-80+						4kg
UBF24	<40W	2350	6500K	74-80+						3kg
UBF16	<25W	1600	6500K	74-80+						2.5kg
UBF8	<15W	800	6500K	74-80+						1.5kg

Operating Voltage: All Raytec units are supplied complete with a dedicated (Universal 100-240V AC auto sensing) current controlled PSU c/w adjustable photocell, power and telemetry input.

Alternative PSU Options include: Integral Low Voltage, PRO and PRO-IQ intelligent range of power supplies with multi function options including remote dimming.

NOTE: Full independent photometry available on request.

* Lumen output depends upon final lens selection. Lumen output shown based on average between 10 and 50 degree angles.

** Cool White as standard - Warm White options available. CRI published reflects range between Cool and Warm White.

*** Other options available including wall and post top with a range of adapters.



innovation + illumination

UK / Europe
T: +44 (0) 1670 520055
F: +44 (0) 1670 819760
sales@raytecctv.com

Americas (Toll Free)
T: +1 888 505 8335
ussales@raytecctv.com

www.raytecctv.com

Raytec have a comprehensive range of specification and support tools including the Raytec Lighting Guide, the Cost Saving Calculator and a host of useful footage.